

# General Specifications

## View Recorder VR100

GS 4N1A1-E

### OVERVIEW

The VR100 is a *PAPER-LESS* recorder that displays real-time measured data on a color LCD and saves data on a 3.5-inch floppy disk. It comes with a four-channel or six-channel model. As the input signal, a DC voltage, thermocouple, resistance temperature detector, or contact signal can be set to each channel. The data saved on a floppy disk can be converted by data conversion software to Lotus 1-2-3, Excel, or ASCII format file, facilitating processing on a PC. Not only this, the *Viewer* software allows a PC to display waveforms on its screen and to print out waveforms.

### STANDARD SPECIFICATIONS

#### General Specifications

##### Construction

##### Mounting (Model VR10□P):

Flush panel mounting (on a vertical plane)

Mounting may be inclined downward up to 30° from a horizontal plane.

##### Allowable Panel Thickness:

2 to 26 mm

##### Material:

Case: drawn steel; bezel: polycarbonate

##### Case Color:

VR10□P: Lamp black (Munsell 0.8Y2.5/0.4 or equivalent)

VR10□D: Ice white (Munsell 6.6Y7.9/0.5 or equivalent)

##### Dimensions:

VR10□P: 144(W)×144(H)×280(D) mm

VR10□D: 144(W)×191.5(H)×326(D) mm

##### Weight:

VR104P: approx. 2.8 kgf, VR106P; approx. 2.7kgf

VR104D: approx. 3.2 kgf, VR106D; approx. 3.0kgf

##### Input

##### Number of Inputs:

VR104□; up to four channels (settable in channels 1 to 4)

VR106□; up to six channels (settable in channels 1 to 4 and 6)


##### Measurement Interval:

VR104□; 125 ms

VR106□; 1 s (2 s when an A/D integration time is set to 100 ms)

##### Inputs:

DCV (DC voltage), TC (thermocouple), RTD (resistance temperature detector), DI (digital input for event recording), DCA (DC current with external shunt resistor attached)

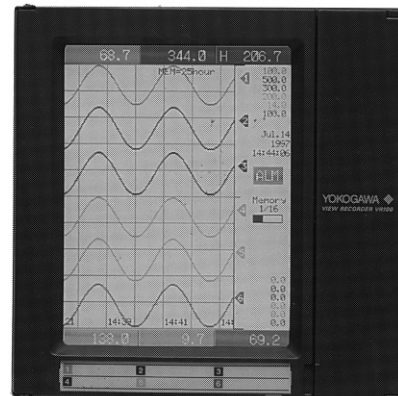

Range setting and measuring range

Input type	Range	Measuring range
DC voltage (DCV)	20mV	-20.00 to 20.00 mV
	60mV	-60.00 to 60.00 mV
	200mV	-200.0 to 200.0 mV
	2V	-2.000 to 2.000 V
	6V	-6.000 to 6.000 V
	20V	-20.00 V to 20.00 V
Thermocouple (TC)	R *1	0.0° to 1760.0°C
	S *1	0.0° to 1760.0°C
	B *1	0.0° to 1820.0°C
	K *1	-200.0° to 1370.0°C
	E *1	-200.0° to 800.0°C
	J *1	-200.0° to 1100.0°C
	T *1	-200.0° to 400.0°C
	N *2	0.0° to 1300.0°C
	W *3	0.0° to 2315.0°C
	L *4	-200.0° to 900.0°C
	U *4	-200.0° to 400.0°C
Resistance temperature detector (RTD) (measurement current i=0.5mA)	Pt100 *5	-200.0° to 600.0°C
	JPt100 *5	-200.0° to 550.0°C
Event recording (DI)	DCV input	Less than 2.4 V: off; 2.4 V or greater: on
	Contact input	Contact on/off

\*1 R, S, B, K, E, J, T: ANSI, IEC 584, DIN IEC 584, JIS C 1602-1981

\*2 N: Nicrosil-Nisil, IEC 584, DIN IEC 584

\*3 W: W•5%Re-W•26%Re (Hoskins Mfg. Co.)

\*4 L: Fe-CuNi, DIN43710

U: Cu-CuNi, DIN43710

\*5 Pt100: JIS C 1604-1989, JIS C 1606-1989, IEC 751, DIN IEC 751

JPt100: JIS C 1604-1981, JIS C 1606-1989

**A/D Integration Time:**

Fixed to 20 ms (50 Hz) or 16.7 ms (60 Hz) 100ms (50/60Hz for VR106□), or AUTO selectable (automatic selection by detection of power supply frequency)

**Thermocouple Burnout:**

Burnout upscale/downscale function can be switched on/off (common for all channels).

Burnout upscale/downscale selectable

**Filter:**

VR104□; On/off selectable (common for all channels)

Time constant: selectable from 2, 5, and 10 seconds

VR106□; moving average on/off selectable (common to all channels), moving average cycles 2 to 16 selectable

**Calculation:**

Differential computation:

Between any two channels; however, reference channel must be smaller than measuring channel number.

Available for DCV, TC, and RTD ranges.

Linear scaling:

Available for DCV, TC, and RTD ranges.

Scaling limits: -20000 to 20000

Decimal point: user-selectable

Engineering unit: user-definable, up to 6 characters

Square root:

Available for DCV range.

Scaling limits: -20000 to 20000

Decimal point: user-selectable

Engineering unit: user-definable, up to 6 characters

**Display****Display unit:**

5.5-inch TFT color LCD (320×240 pixels)

**Analog display:**

Line width of waveforms are user-selectable from 1, 2 and 3 pixels.

**Analog display color:**

VR104□; Default: red for channel 1, green for channel 2, blue for channel 3, red-purple for channel 4  
(The colors above as well as brown are user-selectable for each channel.)

VR106□; default, red for channel 1, green for channel 2, blue for channel 3, red-purple for channel 4, orange for channel 5, light blue for channel 6 (These colors as well as brown and gray are user-definable.)

**Waveform span rate:**

User-selectable from 1, 5, 10, 20, 30, and 60 min/div

**Digital indication:**

Measured values (updated every second), alarm types, engineering units (up to 6 characters), and tags (up to seven characters)

**Memory status display:**

The memory status of the event file is displayed when storing data in the event file in the trigger mode.

The remaining sampling time of the display data file is displayed (from 99 hours before overwriting).

**Other display contents:**

Scale values (0 and 100%, display on/off selectable), hour:minute on grid (number of divisions are selectable from 4, 5, 8 and 10 divisions), current time (year/month/date, hour:minute:second), trip levels (line width of trip levels are user-selectable from 1, 2, and 3 pixels), event mark, alarm (ALM)

**Data referencing function:**

By horizontally splitting the waveform display area into two, current waveforms and reference waveforms can be compared on the display.

Min/max digital values are displayed as reference values.

**Display magnification/reduction function:**

The time scale of analog display can be magnified and reduced by selecting 6, 18, or 30 minutes as the time scale for the display area.

**LCD saver function:**

The LCD backlight automatically dims if no key is touched for a certain preset time (can be set from 1 to 60 minutes).

**Data Saving Function****External storage medium:**

3.5-inch floppy disk (2HD)

(The formatting can be 1.2 (for VR104□ only) or 1.44 MB.)

**Saving method:**

Copying of data from internal memory to floppy disk

**Data Saving Period:**

Linked with the sampling period (for the event file) specified or the waveform span rate (for a display data file)

**Event File Sampling Period:**

VR104□; Selectable from 125 ms, 250 ms, 500 ms, and 1 s.

VR106□; Selectable from 1, 2, 10, 30, 60, and 120s.

**File:**

The following two file types can be created.

- Event file (stores instantaneous values sampled periodically at a specified sampling rate)
- Display data file (stores the maximum and minimum values for each waveform span rate from among measured data sampled at measurement intervals)

Files can be created in the following combinations.

(a) Event file + display data file

(b) Event file × 16 + display data file

(c) Event file only

**Sampling time:****For VR104□**

In case (a) above,

**Display data file (when using full four channels)**

Amount of data: 48,000 points/channel \*2

Wave form span rate (min/div)	1 min	5 min	10 min	20 min	30 min	60 min
Sampling time *1	Approx. 26 hours	Approx. 5 days	Approx. 11 days	Approx. 22 days	Approx. 33 days	Approx. 66 days

**Event file (when using full four channels)**

Amount of data: 30,000 points/channel \*2

Sampling period	125 ms	250 ms	500 ms	1 s
Sampling time *1	Approx. 1 hour	Approx. 2.1 hours	Approx. 4.2 hours	Approx. 8.3 hours

In case (b) above,

The sampling times for the display data file are the same as those in case (a).

**Event file (one of sixteen for four channel inputs)**

Amount of data: 2,000 points/channel \*2

Sampling period	125 ms	250 ms	500 ms	1 s
Sampling time *1	Approx. 4.1 min	Approx. 8.3 min	Approx. 16.6 min	Approx. 33 min

In case (c) above,

**Event file (for four channel inputs)**

Amount of data: 12,000 points/channel \*2

Sampling period	125 ms	250 ms	500 ms	1 s
Sampling time *1	Approx. 4.1 hours	Approx. 8.3 hours	Approx. 16.6 hours	Approx. 33.3 hours

For VR106□

In case (a) above:

Display data file (when using all six channels)

Amount of data: 47,600 points/channel \*2

Waveform span rate (min/div)	1 min	5 min	10 min	20 min	30 min	60 min
Sampling time *1	Approx. 26 hours	Approx. 5 days	Approx. 11 days	Approx. 22 days	Approx. 33 days	Approx. 66 days

Event file (when using all six channels)

Amount of data: 20,000 points/channel \*2

Sampling period	1 s	2 s	10 s	30 s	60 s	120 s
Sampling time *1	Approx. 5.5 hours	Approx. 11 hours	Approx. 2 days	Approx. 6 days	Approx. 13 days	Approx. 27 days

In case (b) above:

The display data files are the same as those in case (a).

Event file (one of sixteen for six channel inputs)

Amount of data: 1,300 points/channel \*2

Sampling period	1 s	2 s	10 s	30 s	60 s	120 s
Sampling time *1	Approx. 21 min	Approx. 42 min	Approx. 3.5 hours	Approx. 10.5 hours	Approx. 21 hours	Approx. 42 hours

In case (c) above:

Event file (for all six channels)

Amount of data: 112,000 points/channel \*2

Sampling period	1 s	2 s	10 s	30 s	60 s	120 s
Sampling time *1	Approx. 31 hours	Approx. 2 days	Approx. 12 days	Approx. 38 days	Approx. 77 days	Approx. 155 days

\*1 The sampling time varies depending on the channel settings

\*2 The amounts of these data are approximate.

Other files:

Setup parameter file (setup parameter list), information file (event, power-failure, and alarm information)

Event information: When the event is occurred, the data no. of the display data file and date/time of occurrence are saved (max. 32 times).

Power-failure information: When a power-failure is occurred, the data no. and date/time of occurrence/recovery are saved (max. 10 times).

Alarm information: When a alarm is occurred, the alarm channel no., alarm type/level and date/time of alarm occurrence/recovery are saved (max. 50 times).

Data format:

Measured data: Binary in Yokogawa standard format (2 bytes/data value)

Setup parameters and event, power-failure, alarm information: ASCII format

Trigger function:

An external contact, key on the recorder panel, or an alarm can be assigned as the trigger to start saving data in an event file.

A pre-trigger function is available. (The trigger point is set in increments of 10% of the memory length.)

Behavior when the memory is full:

Event file:

In the FREE sampling mode: The oldest data are overwritten.

In the TRIG sampling mode: The next trigger is neglected and stored data are retained.

In the ROTATE sampling mode: When the next trigger is raised, the contents of the file (the oldest file when sixteen files have been created) is cleared and storage of the new data begins.

Display data file:

The oldest data are overwritten.

Setting data memory:

Setting data (SET mode, SET-UP mode) can be stored on a FD, and it can be retrieved.

Alarm Function

Number of alarm levels:

Up to four levels for each channel

Alarm types:

High and low limits, differential high and low limits, and high and low rate-of-change limits

Interval time of rate-of-change alarms:

The measurement interval times 1 to 15

Display:

The alarm status (type) is displayed in the digital value display area upon occurrence of an alarm. A common alarm indication is also displayed. The alarming behavior: non-hold- or hold-type can be selectable for common to all channels.

Hysteresis:

On (0.5% of span)/off switchable (common to all channels and alarm levels)

Outputs:

2, 4, or 6 points (optional). On-energized/on-deenergized and hold/non-hold selectable.

Memory:

The times of alarm occurrences/recoveries, alarm types, etc. are stored in the memory. (Up to fifty alarm events per channel are stored.)

Power Supply

Rated power supply:

100 to 240 V DC (automatic switching)

Allowable power supply voltage range:

90 to 132 or 180 to 250 V AC

Rated power supply frequency:

50/60 Hz (automatic switching)

Power consumption:

For VR104□ / VR106□ (Approx.)

Supply voltage	LCD saver mode	Normal	Max.
100 V AC	25 VA	30 VA	60 VA
240 V AC	35 VA	40 VA	70 VA

---

## Other Specifications

### Clock:

With calendar function (Western calendar)  
The time can be adjusted by a remote contact (with the Remote option).

### Accuracy of clock:

$\pm 100$  ppm, excluding a delay (of 1 second, maximum) caused each time the power is turned on/off.

### Memory backup:

The setup parameters are backed up by a built-in lithium battery (battery life: approximately ten years at room temperature).  
The measured values are stored in the flash memory, and thus there are no limitations to the backup time.

### Insulation resistance:

Each terminal to ground terminal: 20 M $\Omega$  or greater (at 500 V DC)

### Dielectric strength:

Power supply to ground terminal: 1500 V AC (50/60 Hz), 1 minute  
Contact output terminal to ground terminal: 1500 V AC (50/60 Hz), 1 minute  
Measuring input terminal to ground terminal: 1000 V AC (50/60 Hz), 1 minute  
Between measuring input terminals: 1000 V AC (50/60 Hz), 1 minute  
Between remote control terminal to ground terminal: 500 V DC, 1 minute

## Safety and EMC Standards

### Safety standards:

Certified by CSA22.2No. 1010.1  
Complies with EN61010-1

### EMI standards:

Complies with EN55011 Group 1 Class A

### Immunity:

Complies with EN50082-2

## Normal Operating Conditions

<b>Power voltage:</b>	90 to 132 or 180 to 250 V AC
<b>Power supply frequency:</b>	50 Hz $\pm 2\%$ , 60 Hz $\pm 2\%$
<b>Ambient temperature:</b>	0° to 50°C (when using FDD: 5 to 40°C)
<b>Ambient humidity:</b>	20% to 80%RH (at 5° to 40°C)
<b>Vibration:</b>	10 to 60 Hz, 0.2 m/s <sup>2</sup> or less
<b>Shock:</b>	Not acceptable
<b>Magnetic field:</b>	400 AT/m or less (DC and 50/60 Hz)
<b>Noise:</b>	Normal mode (50/60 Hz) DCV    The peak value including the signal must be less than 1.2 times the measuring range. TC      The peak value including the signal must be less than 1.2 times the measuring thermal electromotive force. RTD    50 mV or less Common mode (50/60 Hz) 250 Vrms AC or less for all ranges Maximum noise voltage between channels (50/60 Hz) 250 Vrms AC or less
<b>Mounting position:</b>	Can be inclined up to 30° backward. Mounting at an angle away from the perpendicular is not acceptable.
<b>Warm-up time:</b>	At least 30 minutes after power on

## Standard Performance

### Measuring and Recording Accuracy:

The following specifications apply to operation of the recorder under standard operation conditions: temperature at 23°±2°C; humidity of 55%±10%RH; power supply voltage of 90 to 132 or 180 to 250 V AC; power supply frequency of 50/60 Hz ±1%; and warm-up time of at least 30 minutes. Other ambient conditions such as vibration should not adversely affect recorder operation.

Input	Range	Measurement Accuracy (Digital Display)	Max. Resolution of Digital Display
DCV	20 mV	±(0.2% of rdg + 3 digits)	10 µV
	60 mV	±(0.2% of rdg + 2 digits)	10 µV
	200 mV	±(0.2% of rdg + 2 digits)	100 µV
	2 V	±(0.1% of rdg + 2 digits)	1 mV
	6 V	±(0.3% of rdg + 3 digits)	1 mV
	20 V	±(0.3% of rdg + 2 digits)	10 mV
TC (excluding the reference junction compensation accuracy)	R	±(0.15% of rdg + 1°C) However, R, S: ±3.7°C at 0° to 100°C ±1.5°C at 100° to 300°C B: ±2°C at 400° to 600°C accuracy at less than 400°C is not guaranteed	0.1°C
	S		
	B		
	K	±(0.15% of rdg + 0.7°C) However, (0.15% of rdg + 1°C) at -200° to -100°C	
	E	±(0.15% of rdg + 0.5°C)	
	J	±(0.15% of rdg + 0.5°C)	
	T	However, ±(0.15% of rdg + 0.7°C) at -200° to -100°C	
	N	±(0.15% of rdg + 0.7°C)	
	W	±(0.15% of rdg + 1°C)	
	L	±(0.15% of rdg + 0.5°C)	
	U	However, ±(0.15% of rdg + 0.7°C) at -200° to -100°C	
RTD	Pt100	±(0.15% of rdg + 0.3°C)	
	JPt100		

### Maximum resolution of analog display:

Waveform display:

Amplitude (vertical) axis: 280 pixels (97 mm)

Time axis (horizontal) axis: 180 pixels (62 mm)

Pixel pitch: 0.348 (vertical) mm × 0.348 (horizontal) mm

### Measurement accuracy in case of scaling (digits)

$$= \text{measurement accuracy (digits)} \times \frac{\text{scaling span (digits)}}{\text{measurement span (digits)}} + 2 \text{ digits}$$

Decimals are rounded off to the next highest number.

### Reference junction compensation:

INT (internal)/EXT (external) selectable (common for all channels)

### Reference junction compensation accuracy (above 0°C):

Types R, S, B, W: ±1°C

Types K, J, E, T, N, L, U: ±0.5°C

### Maximum allowable input voltage:

±10 V DC (continuous) for less than 2 V DC ranges and TC ranges

±30 V DC (continuous) for 6V and 20V ranges

### Input resistance:

Approximately 10 MΩ or more for DCV ranges of 2V or less and TC

Approximately 1 MΩ for 6V and 20V DCV ranges

### Input source resistance:

DCV, TC: 2 kΩ or less

RTD: 10 Ω or less per wire (The resistance of all three wires must be equal.)

### Input bias current:

10 nA or less (approximately 100 nA when the burnout upscale/downscale function is switched on)

### Maximum common mode voltage:

250 Vrms AC (50/60 Hz)

### Maximum noise voltage between channels:

250 Vrms AC (50/60 Hz)

### Interference between channels:

120 dB (when the input source resistance is 500 Ω and the inputs to other channels are 30 V)

### Common mode rejection ratio:

120 dB (50/60 Hz ±0.1%, 500 Ω imbalance between the minus terminal and ground)

### Normal mode rejection ratio:

40 dB (50/60 Hz ±0.1%)

## Effects of Operating Conditions

### Ambient temperature:

with temperature variation of 10°C:

Digital indication:  $\pm(0.1\%$  of rdg + 1 digit) or less  
excluding the error of reference junction compensation

### Power supply:

with variation within 90 to 132 V and 180 to 250 V AC (50/60 Hz):

Digital indication:  $\pm 1$  digit or less

with variation of  $\pm 2$  Hz from rated power frequency (at 100 V AC):

Digital indication:  $\pm(0.1\%$  of rdg + 1 digit) or less

### Magnetic field:

AC (50/60 Hz) and DC 400 A/m fields:

Digital indication:  $\pm(0.1\%$  of rdg + 10 digits) or less

### Input source resistance:

(1) DCV range

with variation of  $\pm 1$  k $\Omega$ :

Ranges of 2V or less: within  $\pm 10$   $\mu$ V

Ranges of 6V or greater:  $-0.1\%$  of rdg or less

(2) TC range

with variation of  $\pm 1$  k $\Omega$ :

Within  $\pm 10$   $\mu$ V ( $\pm 100$   $\mu$ V when the burnout upscale/  
downscale function is switched on)

(3) RTD range

with variation of 10 $\Omega$  per wire (resistance of all three wires  
must be equal):

Digital indication:  $\pm(0.1\%$  of rdg + 1 digit) or less

with maximum difference of 40 m $\Omega$  between wires:

Digital indication: approximately  $\pm 0.1^\circ\text{C}$

### Mounting position:

with variation in inclination of  $\pm 30\%$  backward or forward

Digital indication:  $\pm(0.1\%$  of rdg + 1 digit) or less

### Vibration:

when sine-wave motion of frequency of 10 to 60 Hz and accelera-  
tion of 0.2 m/s<sup>2</sup> is applied to the recorder in the directions of three  
axes for two hours:

Digital indication:  $\pm(0.1\%$  of rdg + 1 digit) or less

## Transport and Storage Conditions

The following specifies the environmental conditions required during  
transportation from shipment to the start of service and during storage  
as well as during transportation and storage if this instrument is  
temporarily taken out of service.

No malfunction will occur under these conditions without serious  
damage which is absolutely impossible to repair; however, calibration  
may be necessary to recover normal operation performance.

**Ambient temperature:**  $-25^\circ$  to  $60^\circ\text{C}$

**Humidity:** 5% to 95%RH (No condensation is allowed.)

**Vibration:** 10 to 60 Hz, 4.9 m/s<sup>2</sup> maximum

**Shock:** 392 m/s<sup>2</sup> maximum (while being packed)

## SPECIFICATIONS OF OPTIONAL FUNCTIONS

### Alarm Output Relays (/A1, /A2, /A3)

An alarm signal is output from the rear panel as a relay contact signal.

**Relay contact rating:** 250 V DC/0.1 A (for resistance load) 250 V  
AC (50/60 Hz)/3 A

**Terminal configuration:** SPDT (NO-C-NC)

(Energized-at-alarm/deenergized-at-alarm,  
AND/OR, and hold/non-hold actions are  
selectable.)

### RS-422A Communication Interface (/C3)

This interface allows the host computer to control and make settings for  
the recorder as well as receive data from the recorder.

**Synchronization method:** Start-stop asynchronous transmission

**Communication level:** Conforming to EIA RS-422A standard

**Connection method:** 4-wire half-duplex multi-drop connection  
(1:N where N = 1 to 16)

**Transmission speed:** 1200, 2400, 4800, or 9600 bps

**Data length:** 7 or 8 bits

**Stop bit:** 1 or 2 bits

**Parity:** Odd, even, or none

**Communication distance:** Up to 500 m

**Communication mode:** ASCII for input/output for control and  
setting  
ASCII or binary for output of measured  
data

### deg F Display (/D2)

Uses deg F as the temperature unit.

### Fail/Memory End Output (/F1)

The relay contact output on the rear panel indicates the occurrence of a  
system error and the time specified until end of memory (selectable  
from 1, 2, 5, 10, 20, 50, 100 hours) before the data in a continuously  
storing file are overwritten.

**Relay contact rating:** 250 V DC/0.1 A (for resistance load) 250 V AC  
(50/60 Hz)/3 A

### Clamped Input Terminal (/H2)

used clamped input terminals as input terminal.

### French/German display, Summer/Winter time (/L1)

French or German display can be selected. Summer and Winter time can  
be set.

### Cu10, Cu25 RTD Input (/N1)

This option allows Cu10 and Cu25 inputs to be added to the standard  
input types.

#### Measuring Range of Cu10 and Cu25 Inputs

Input Type		Measuring Range
RTD (measurement current i = 1.5 mA)	Cu10 (GE): $\alpha = 0.003855$ at $25^\circ\text{C}$	$-200^\circ$ to $300^\circ\text{C}$
	Cu10 (L&N): $\alpha = 0.003852$ at $25^\circ\text{C}$	
	Cu10 (WEED): $\alpha = 0.003862$ at $25^\circ\text{C}$	
	Cu10 (BAILEY): non-linear	
	Cu10: $\alpha = 0.00392$ at $20^\circ\text{C}$	
	Cu10: $\alpha = 0.00393$ at $20^\circ\text{C}$	
	Cu25: $\alpha = 0.00425$ at $0^\circ\text{C}$	

### Measurement Accuracy

Input Type	Measurement Accuracy
Cu10 (GE): $\alpha = 0.003855$ at 25°C	$\pm(0.4\% \text{ of rdg} + 1.0^\circ\text{C})$
Cu10 (L&N): $\alpha = 0.003852$ at 25°C	
Cu10 (WEED): $\alpha = 0.003862$ at 25°C	
Cu10 (BAILEY): non-linear	
Cu10: $\alpha = 0.00392$ at 20°C	
Cu10: $\alpha = 0.00393$ at 20°C	$\pm(0.3\% \text{ of rdg} + 0.8^\circ\text{C})$
Cu25: $\alpha = 0.00425$ at 0°C	

### 24VDC Power Supply (/P1)

Rated power supply : 24VDC

Allowable power supply voltage range : 21.6 to 26.4VDC

Power Consumption:

(Approx.)

Supply Voltage	LCD server mode	Normal	Max.
24VDC	15VA	20VA	50VA

### Remote Control (/R1)

This option allows the following functions to be controlled remotely by contact input:

- Ext. trigger for event file (trigger, 250ms or longer)
- Writing of event marks (trigger, 250ms or longer)
- Time adjustment (trigger, 250ms or longer)

When a trigger is occurred, corrects the internal clock as follows.

Time of Trigger-on	Processing
hh:00:00 to hh:01:59	Cut off readings of less than one minute. E.g., 10:00:50 is corrected as 10:00:00.
hh:58:00 to hh:59:59	Round up readings of less than one minute. E.g., 10:59:50 is corrected as 11:00:00.
hh:02:00 to hh:57:59	No processing is to be performed.

## APPLICATION SOFTWARE (ACCESSORIES)

### VR100 application software package

#### File conversion software

Operating environment

PC: IBM PC-AT compatible models

Memory: 640KB or more (free area of at least 400KB)

OS: MS-DOS Ver.5.0 or later

Disk: 3.5-inch FD (1.44MB format)

#### File conversion/Data viewer software

Operating environment

PC: A personal computer that can run MS-Windows Ver.3.1

CPU: 80386SX or later

Memory: 8MB or more

OS: MS-Windows Ver.3.1

Disk: 3.5-inch FD (1.44MB format)

Hard disk (free area of at least 2MB)

CRT: Compatible with MS-Windows Ver.3.1 (16colors or higher recommended)

Printer: A printer and printer driver compatible with MS-Windows Ver.3.1

### VR enhanced application software

Operating environment

PC: A personal computer that can run MS-Windows Ver.3.1 or Windows95

CPU: 80486DX2 or later (pentium90 or higher recommended)

Memory: 16MB or more

OS: MS-Windows Ver.3.1 or Windows95

Disk: 3.5-inch FD (1.44MB format)

Hard disk (free area of at least 2MB)

CRT: Compatible with MS-Windows Ver.3.1 or Windows95

Can display analog RGB 256 colors or higher (64,000 colors or higher recommended)

Printer: A printer and printer driver compatible with MS-Windows Ver.3.1 or Windows95

### VR data viewer for windows95

Operating environment

PC: A personal computer that can run or Windows95

CPU: 80486DX4 or later (Pentium120 or higher recommended)

Memory: 16MB or more

OS: Windows95

Disk: 3.5-inch FD (1.44MB format)

Hard disk (free area of at least 15MB)

CRT: Compatible with Windows95

Can display analog RGB 256 colors of higher (64,000 colors or higher recommended)

Printer: A printer and Printer driver compatible with Windows95

- MS and MS-DOS is a registered trademark of Microsoft Corporation USA.
- Excel is a registered trademark of Microsoft Corporation USA.
- Windows is a registered trademark of Microsoft Corporation USA.
- IBM, IBM PC/AT is a registered trademark of International Business Machines Corp.
- Lotus 1-2-3 is a registered trademark of Lotus Development Corporation.
- Other company and/or product names is registered trade marks of their manufactures.

## MODEL AND SUFFIX CODES

Model Code	Suffix Code	Option Code	Description
<b>VR104P</b>			View Recorder VR100 (4ch, Panel mounted model)
<b>VR104D</b>			View Recorder VR100 (4ch, Desk top model)
<b>VR106P</b>			View Recorder VR 100 (6ch, Panel mount model)
<b>VR106D</b>			View Recorder VR 100 (6ch, Desk top model)
Application software	-0		No application software
	-2		with applicaion software (VP100-02)
Power input cable	-D		Power cord UL, CSA, st'd *1
	-F		Power cord VDE st'd *1
	-R		Power cord SAA st'd *1
	-J		Power cord BS st'd *1
	-W		Screw type power input terminal (w/o power cord) *2
Options		/ A1	Alarm output relay (2 points) *3
		/ A2	Alarm output relay (4 points) *3
		/ A3	Alarm output relay (6 points) *3
		/ C3	RS-422-A interface
		/ D2	deg F display
		/ F1	FAIL/memory end detection and output *4
		/ H2	Clamped input terminal
		/ L1	French/German display, Summer/Winter time
		/ N1	Cu10, Cu25 RTD input
		/ P1	24VDC power supply*5
		/ R1	Remote control

\*1 A power cord (-D, -F, -R, or -J) can only be specified for the VR104D/VR106D.

\*2 Screw type power terminal (-W) must be specified for the VR104P/VR106P.

\*3 /A1, /A2, and /A3 cannot be specified together.

\*4 If /F1 is specified, /A3 cannot be specified.

\*5 If /P1 is specified, screw power terminals (-w) must be specified.

Model Code	Description	OS
VP100-02	VR100 application software package	MS-DOS, Windows3.1
VA100-02	VR enhanced data viewer software	Windows3.1, Windows95
VA200-02	VR data viewer for Windows95	Windows95

## STANDARD ACCESSORIES

Item(s)	Quantity
Mounting brackets	2
Fuse	1
Terminal screws	5
Instruction manual	1

## OPTIONAL ACCESSORIES


Item(s)	Model (Part) Number	Specification
Shunt resistors (for screw input terminal)	4159 20	250 $\Omega$ $\pm$ 0.1%
	4159 21	100 $\Omega$ $\pm$ 0.1%
	4159 22	10 $\Omega$ $\pm$ 0.1%
Shunt resistor (for clamped input terminal, /H2)	4389 20	250 $\Omega$ $\pm$ 0.1%
	4389 21	100 $\Omega$ $\pm$ 0.1%
	4389 22	10 $\Omega$ $\pm$ 0.1%
3.5-inch floppy disks	7059 00	2HD (10 disks)
Fuse	A1360EF	250 V, 500-mA time lag
	A1102EF	250 V, 5A time lag (for /P1)
Mounting brackets	B9900CW	—




## DIMENSIONS

VR104P

unit : mm  
(approx. inch)

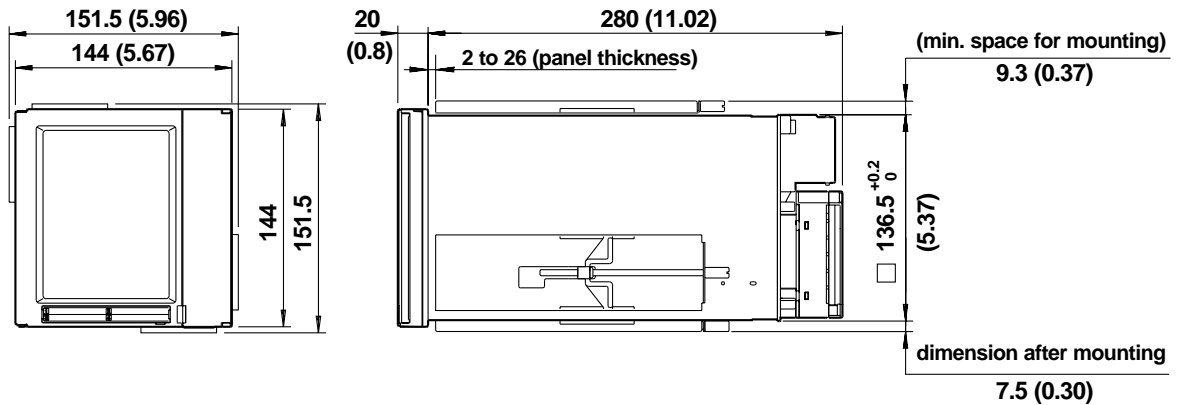


### Panel cutout

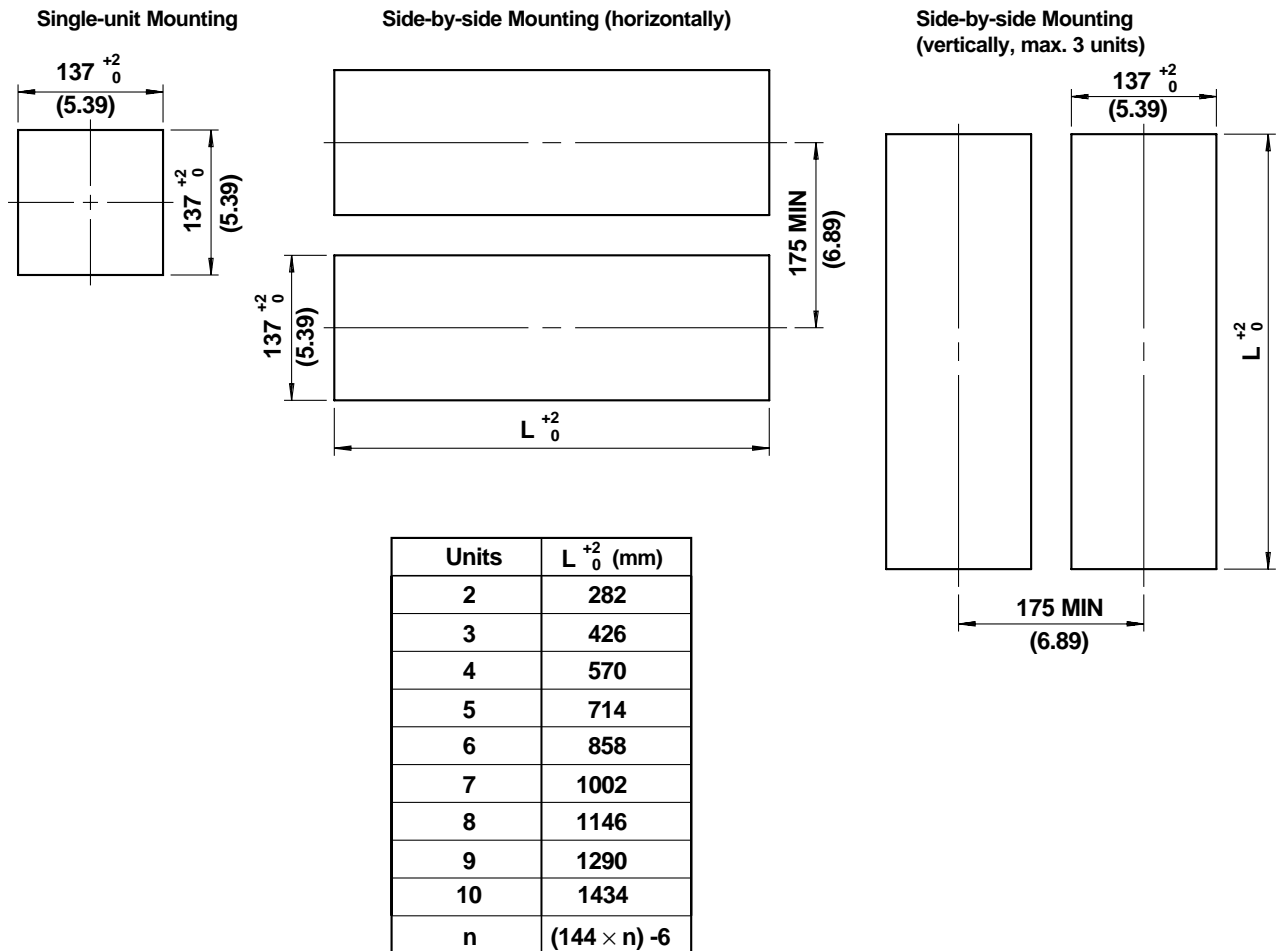


Note: If not specified, the tolerance is  $\pm 3\%$ . However, for dimensions less than 10 mm, the tolerance is  $\pm 0.3$  mm.

## VR104D

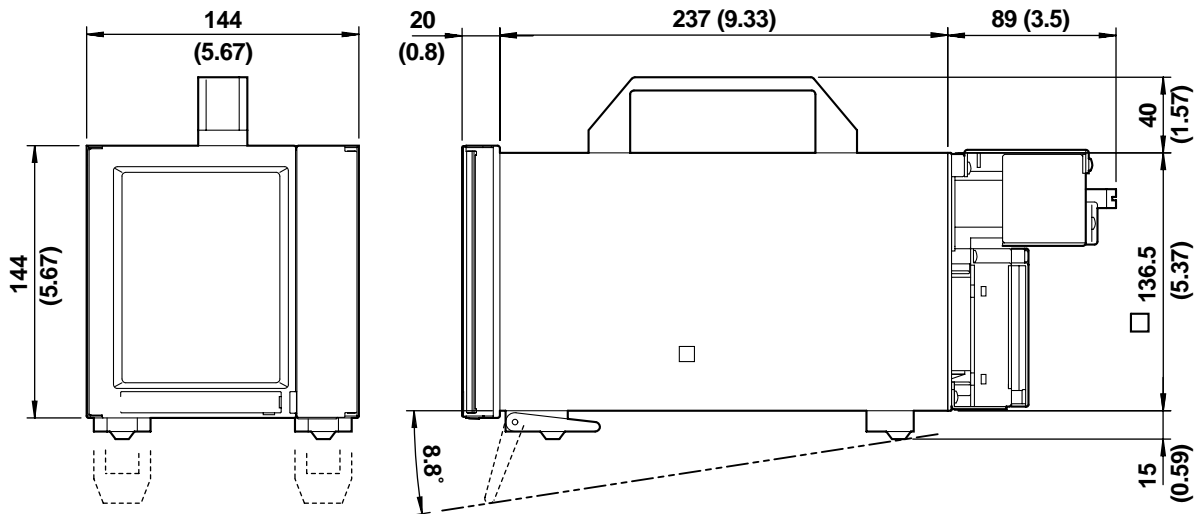


## Terminal Arrangements

### /P1model



Power supply terminal


Input terminal

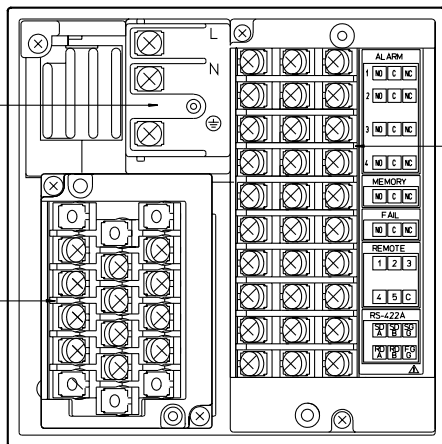


Option terminal

## Input Terminals


Screw-on input terminals for VR104□




Pushed and tightened input terminals (/H2) for VR104□



Screw-on input terminals for VR106□



Pushed and tightened input terminals (/H2) for VR106□



## Option Terminals

### /A1/C3/F1/R1 combination

NO	C	NC	1	Alarm output relay (/A1)
NO	C	NC	2	
NO	C	NC		Memory end output (/F1)
NO	C	NC		
				FAIL output (/F1)
①	②	③		Remote control (/R1)
④	⑤	⑥		
SD (A)	SD (B)	SG		Communication (RS-422A) (/C3)
RD (A)	RD (B)	FG		

### /A2/C3/F1/R1 combination

NO	C	NC	1	Alarm output relay (/A2)
NO	C	NC	2	
NO	C	NC	3	Memory end output (/F1)
NO	C	NC	4	
NO	C	NC		FAIL output (/F1)
NO	C	NC		
①	②	③		Remote control (/R)
④	⑤	⑥		
SD (A)	SD (B)	SG		Communication (RS-422A) (/C3)
RD (A)	RD (B)	FG		

### /A3/C3/R1 combination

NO	C	NC	1	Alarm output relay (/A3)
NO	C	NC	2	
NO	C	NC	3	Memory end output (/F1)
NO	C	NC	4	
NO	C	NC	5	FAIL output (/F1)
NO	C	NC	6	
①	②	③		Remote control (/R1)
④	⑤	⑥		
SD (A)	SD (B)	SG		Communication (RS-422A) (/C3)
RD (A)	RD (B)	FG		