

# General Specifications

GS 77J01A01-01E

Model VJA1

Distributor

(Isolated Single-output and Isolated Dual-output Types) (with HART Communication: VJA1/H)


JUXTA

## General

The VJA1 is a compact, plug-in type distributor that is used in combination with a two-wire type transmitter to convert the transmitter's 4 to 20 mA DC signals into isolated DC current or DC voltage signals.

- HART communication: VJA1/H (option code /H)  
Bi-directional relay of HART communication signals is possible while the field devices and the higher-level device are isolated from each other.
- Supports BARD-800.

## Model and Suffix Codes

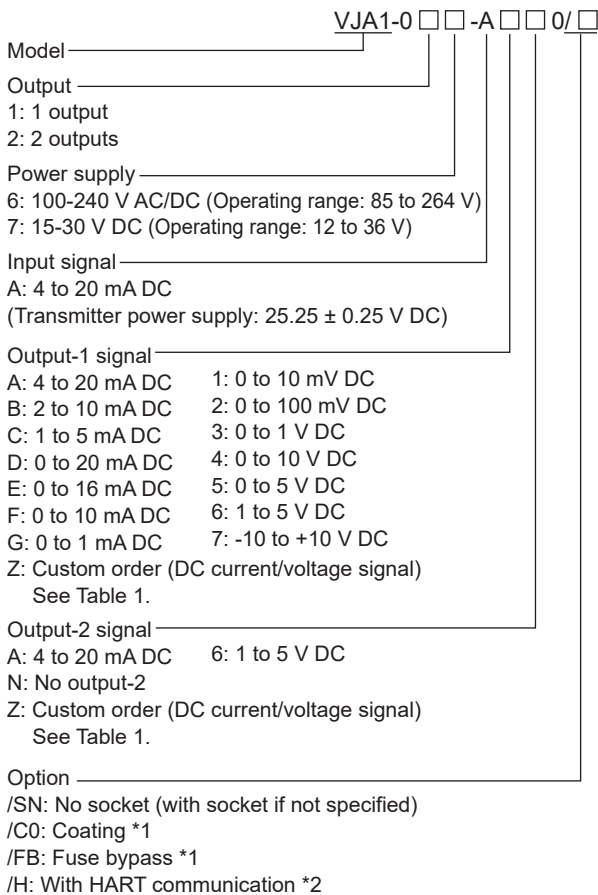

- \*1 When option code /C0 or /FB is specified, the conformity to the safety and EMC standards is excluded. CE marking is not applicable.
- \*2 When option code /H is specified, the output-1 signal code is "A" (4 to 20 mA DC) only.
- Note 1: "/C0" option: Polyurethane coating. The "/C0" option does not guarantee the coating effect though it is expected that the corrosion resistance for electric circuit is reinforced. And it is not able to submit coating test data.
- Note 2: "/FB" option: The primary power supply fuse is deleted, short circuit and ship it.



## Ordering Information

- Model and Suffix Codes: e.g. VJA1-026-AAA0

## Input/Output Specifications

- Input signal: 4 to 20 mA DC signal from two-wire type transmitter  
Input resistance: 250 Ω  
Transmitter power supply: 25.25±0.25 V DC (provided with a current limiter to keep the current between 25 and 35 mA)  
Allowable conductor resistance (RL):  
Up to [(20 – transmitter's minimum operating voltage) V/0.02 A] Ω  
Maximum allowable input current: 40 mA DC  
Output signal: DC voltage or DC current signal  
Output variable range: -6 to 106 % (Both output-1 and output-2)  
Allowable load resistance:

Output-1 Range	Allowable Load Resistance	Output-1 Range	Allowable Load Resistance
4 to 20 mA DC	750 Ω maximum	0 to 10 mV DC	250 kΩ minimum
2 to 10 mA DC	1500 Ω maximum	0 to 100 mV DC	250 kΩ minimum
1 to 5 mA DC	3000 Ω maximum	0 to 1 V DC	2 kΩ minimum
0 to 20 mA DC	750 Ω maximum	0 to 10 V DC	10 kΩ minimum
0 to 16 mA DC	900 Ω maximum	0 to 5 V DC	2 kΩ minimum
0 to 10 mA DC	1500 Ω maximum	1 to 5 V DC	2 kΩ minimum
0 to 1 mA DC	15 kΩ maximum	-10 to +10 V DC	10 kΩ minimum
Output-2 Range	Allowable Load Resistance	Output-2 Range	Allowable Load Resistance
4 to 20 mA DC	350 Ω maximum	1 to 5 V DC	2 kΩ minimum

Note: When using HART communication, observe the allowable load resistance range specified in the HART communication specifications.

Output resistance:

Current output: 500 kΩ or more

Voltage output other than below: 1 Ω or less

0 to 10 mV DC, 0 to 100 mV DC: 100 Ω or less

Zero adjustment: -5 to +5%

Span adjustment: 95 to 105%

## HART Communication Specifications

Frequency band: 500 Hz to 10 kHz (-6dB range)  
500 Hz to 5 kHz (-3dB range)

Allowable load resistance: 230 to 600 Ω

Communication direction: Bi-directional \*

\* In a multi-drop connection, the transmitter power supply on the VJA1/H cannot be used.

Maximum number of connectable HART communication devices: 5 \*

\* HART communication can only be used between the input and Output-1.

**Trademarks:**

HART is a registered trademark of the HART Communication Foundation.

**Standard Performance**

Accuracy rating:  $\pm 0.1\%$  of span; accuracy is not guaranteed for output levels less than 0.5% of the span of a 0 to X mA output range type.

Response speed: 150 ms, 63% response (10 to 90%)

Effect of power supply voltage fluctuation: Within the accuracy range of span for power supply voltage fluctuation.

Effect of ambient temperature change:  $\pm 0.15\%$  of span for change of 10°C

**Safety and EMC Standards**

CE:

EMC directive

- EN 61326-1 Class A Table 2 <sup>\*1</sup> compliance
- EN 61326-2-3 compliance
- EN 61000-3-2 compliance
- EN 61000-3-3 compliance
- EN 55011 Class A Group 1 compliance

Low voltage directive:

- EN 61010-1, EN 61010-2-030
- Overvoltage category II <sup>\*2</sup>, Pollution degree 2 <sup>\*3</sup>, Measurement category O (other)

CSA: CAN/CSA C22.2 No. 61010-1

- CAN/CSA C22.2 No. 61010-2-030
- Overvoltage category II <sup>\*2</sup>, Pollution degree 2 <sup>\*3</sup>, Measurement category O (other)

UL: UL 61010-1 (CSA NRTL/C)

- UL 61010-2-030 (CSA NRTL/C)
- Overvoltage category II <sup>\*2</sup>, Pollution degree 2 <sup>\*3</sup>, Measurement category O (other)

RCM: EN 55011 Class A Group 1 compliance

KC: Electromagnetic wave interference prevention standard, electromagnetic wave protection standard compliance

- \*1 The instrument continues to operate at a measurement accuracy of within  $\pm 20\%$  of the range during testing.
- \*2 Overvoltage category II: Describes a number which defines a transient overvoltage condition. Implies the regulation for impulse withstand voltage. "II" applies to electrical equipment which is supplied from the fixed installation like a distribution board.
- \*3 Pollution degree 2: Describes the degree to which a solid, liquid, or gas which deteriorates dielectric strength or surface resistivity is adhering. "2" applies to normal indoor atmosphere. Normally, only non-conductive pollution occurs.

However, if optional code /C0 or /FB is specified, the conformity to the safety and EMC standards is excluded.

**Environment Standard**

EU RoHS directive: EN IEC 63000

(However, when option code /C0 or /FB is specified, CE marking is not applicable because the product does not comply with the Safety and EMC standards.)

**Power Supply and Isolation**

Power supply rated voltage:  
100-240 V AC/DC  $\approx$  50/60 Hz or  
15-30 V DC  $\approx$

Power supply input voltage:  
100-240 V AC/DC  $\approx$  (-15, +10%) 50/60 Hz  
or 15-30 V DC  $\approx$  ( $\pm 20\%$ )

Power consumption:  
3.2 W at 24 V DC ; 3.1 W at 110 V DC;  
6.1 VA at 100 V AC; 8.3 VA at 200 V AC

Insulation resistance: 100 M $\Omega$  minimum at 500 V DC  
between input, output-1, output-2, power  
supply and grounding terminals mutually

Withstanding voltage: 2000 V AC for one minute  
between input, (output-1 and output-2),  
power supply and grounding terminals  
mutually;

1000 V AC for one minute between  
output-1 and output-2 terminals

**Environmental Conditions**

Temperature: -10 to 55°C (45°C or less for side-by-side close installation\*)

- \* If the previous model (style S3.xx earlier) is installed together, the ambient temperature is 0 to 40°C.

Humidity: 5 to 90% RH (no condensation)

Ambient Condition: Avoid installation in such environments as corrosive gas like sulfide hydrogen, dust, sea breeze and direct sunlight.

Magnetic field: 400 A/m or less.

Continuous vibration (at 5 to 9 Hz) Half amplitude of 3 mm or less (at 9 to 150 Hz) 4.9 m/s<sup>2</sup> or less, 1 oct/min for 90 minutes each in the 3-axis directions.

Impact: 98 m/s<sup>2</sup> or less, 11 msec, 3-axis 3 times each in 6 directions.

Altitude: 2000 m or less.

Installation location: Indoors

Warm-up time: At least 30 minutes after power on.

**Transport and Storage Conditions**

Ambient temperature: -25 to 70°C

Temperature change rate: 20°C per hour or less

Ambient humidity: 5 to 95%RH (no condensation)

**Mounting and Appearance**

Construction: Compact plug-in type

Material: Modified polyphenylene oxide (casing)

Mounting method: Wall, DIN rail or dedicated VJ mounting base (VJCE) mounting

- \* If you install the VJA1/H into a VJCE-011, you cannot directly connect the VJCE-011 to a YOKOGAWA DCS with a KS2 cable (CN1). Connect them through a terminal block (such as the TE16).

Connection method: M3 screw terminals

External dimensions:

76 (H)  $\times$  29.5 (W)  $\times$  124.5 (D) mm  
(including a socket)

Weight: Main unit: 100 g or less

Socket: 50 g or less

**Accessories**

Tag number label: 1 sheet

## ■ Customized Signal Specifications

### ● Output custom specification


Table 1 Manufacturable Ranges

	Current Signal	Voltage Signal
Output range (DC)	0 to 24 mA	-10 to +10 V
Span (DC)	1 to 24 mA	10 mV to 20 V
Zero elevation	0 to 200%	-100 to +200%

Note: Customized specifications for the output-1 signal within 0 to 20 mA DC or within -10 to +10 V DC comply with safety standards, EMC standards, and environmental standards.

- The above note is limited to the standard specification of output-2.
- Other customized specifications do not conform to these standards.

## ■ Terminal Assignments




1	Input	(PS+)
2	Output-2	(+)
3	Input	(-)
4	Input	(COM)
5	Output-2	(-)
6	Do not use	
7	Output-1	(+)
8	GND	
9	Output-1	(-)
10	Supply	(L+)
11	Supply	(N-)


Do not use output-2 for the single-output type.

## ■ Block Diagrams

Combination with two-wire transmitter using external power supply




Combination with two-wire transmitter using internal power supply

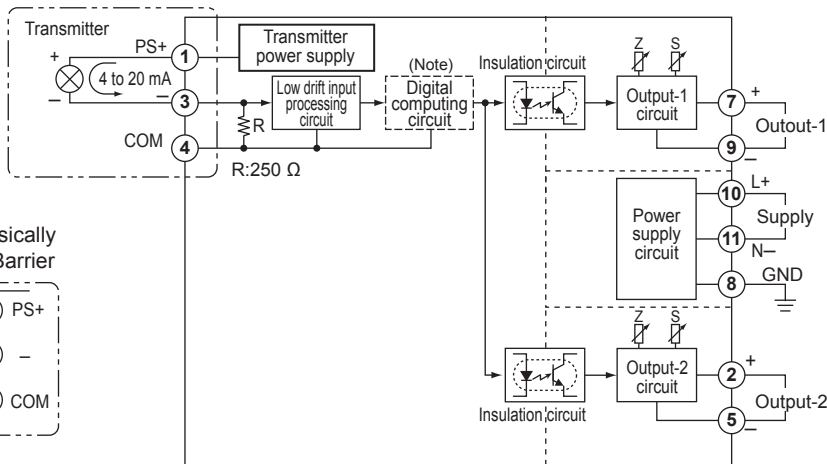


Note: Digital computing circuit is added for the input/output suffix codes other than "A" and "6".

Example to construct Intrinsically Safe System using Zener Barrier




## When option code /H

Combination with two-wire transmitter using external power supply



Combination with two-wire transmitter using internal power supply

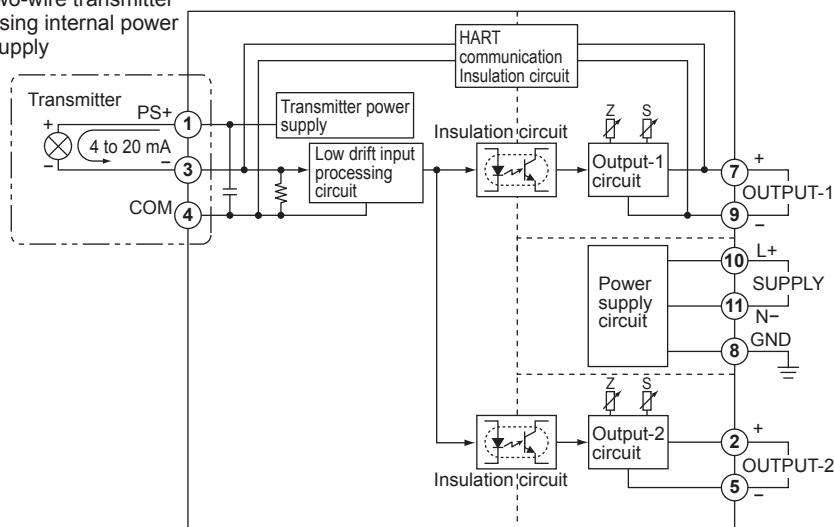

## External Dimensions

