

# General Specifications

## Model JM11 Isolator (mV Input Free Range Type)

JUXTA

GS 77J03M01-01E

### General

The JM11 is a plug-in type isolator that converts mV DC voltage signals into isolated DC current or DC voltage signals

- Input setting, burnout setting, I/O adjustment, I/O monitoring, and segmental point setting (for custom order only) can be made through a PC (VJ77) or Handy Terminal (JHT200).
- The operation indicating lamp shows the operating status, abnormal setting and the like.
- I/O adjustment and wiring resistance correction can be made using a switch on the front of the JM11 without a setting tool such as Handy Terminal.

### Model and Suffix Codes

Model JM11-□□-□□□□

Usage \_\_\_\_\_  
1: General use

Power supply \_\_\_\_\_  
3: 24V DC  $\pm 10\%$   
4: 100-130 V AC/DC (Operating range: 85 to 150V AC/DC)  
5: 200-240 V AC (Operating range: 170 to 264V AC)


Input signal \_\_\_\_\_  
1: Within -60 to 240 mV DC  
0: (Custom order) Segmental line linearization

Output signal \_\_\_\_\_  
A: 4 to 20mA DC      1: 0 to 10mV DC  
B: 2 to 10mA DC      2: 0 to 100mV DC  
C: 1 to 5mA DC       3: 0 to 1V DC  
D: 0 to 20mA DC      4: 0 to 10V DC  
E: 0 to 16mA DC      5: 0 to 5V DC  
F: 0 to 10mA DC      6: 1 to 5V DC  
G: 0 to 1mA DC       7: -10 to +10V DC  
Z: Customized current signals\* 0: Customized voltage signals\*  
\* See Customized Signal Specifications

Burnout function \_\_\_\_\_  
U: Up  
D: Down  
N: Off

### Items to be Specified when Ordering

- Model and Suffix Codes: e.g. JM11-14-1AU
  - Input Range: e.g. 0 to 100 mV DC
- Specify segmental points (32 points) in Work Sheet when segmental line linearization is required.  
The isolator will be shipped with proportional I/O if no specification of segmental points.

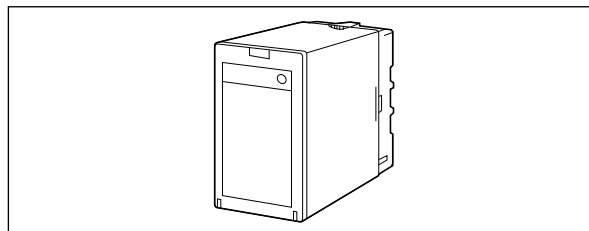

### Input/Output Specifications

Input signal: mV DC potential difference

Measuring range: -60 to 240 mV DC

Input span: 3 mV DC minimum

Input resistance: 1 M $\Omega$  minimum; 10 k $\Omega$  minimum during power off

Allowable signal source resistance: 1 k $\Omega$  maximum

Allowable input level: -0.5 to +4.0 V DC

Output signal: DC voltage or DC current signal

Allowable load resistance:

Output Range	Allowable Load Resistance	Output Range	Allowable Load Resistance
4 to 20 mA DC	750 $\Omega$ maximum	0 to 10 mV DC	250 k $\Omega$ minimum
2 to 10 mA DC	1500 $\Omega$ maximum	0 to 100 mV DC	250 k $\Omega$ minimum
1 to 5 mA DC	3000 $\Omega$ maximum	0 to 1 V DC	2 k $\Omega$ minimum
0 to 20 mA DC	750 $\Omega$ maximum	0 to 10 V DC	10 k $\Omega$ minimum
0 to 16 mA DC	900 $\Omega$ maximum	0 to 5 V DC	2 k $\Omega$ minimum
0 to 10 mA DC	1500 $\Omega$ maximum	1 to 5 V DC	2 k $\Omega$ minimum
0 to 1 mA DC	15k $\Omega$ maximum	-10 to +10 V DC	10 k $\Omega$ minimum

Input adjustment:  $\pm 1\%$  of span minimum (Zero/Span)

Output adjustment:  $\pm 5\%$  of span minimum (Zero/Span)

### Standard Performance

Accuracy rating:

Input conditions	Accuracy
When the input range is between -20 and +20 mV DC, and the span is 10 mV or more	$\pm 0.1\%$ of span
When the input range is between -20 and +20 mV DC, and the span is less than 10 mV	$(0.1 [\%] \times 10 [\text{mV DC}]) / \text{Input span} [\text{mV DC}] [\%]$
When the input range is between -60 and +100 mV DC, and the span is 40 mV or more	$\pm 0.1\%$ of span
When the input range is between -60 and +100 mV DC, and the span is less than 40 mV	$(0.1 [\%] \times 40 [\text{mV DC}]) / \text{Input span} [\text{mV DC}] [\%]$
When the input range is between -60 and +240 mV DC, and the span is 200 mV or more	$\pm 0.1\%$ of span
When the input range is between -60 and +240 mV DC, and the span is less than 200 mV	$(0.1 [\%] \times 200 [\text{mV DC}]) / \text{Input span} [\text{mV DC}] [\%]$

Accuracy is not guaranteed for output levels less than 0.1mA for the output codes D, E, and F, and for output levels less than 0.0125mA for the output code G.

Response speed: 200 ms, 63% response (10 to 90%)

Burnout: Up, Down or Off; the maximum burnout time is specified as 60 seconds.

Insulation resistance: 100 MΩ minimum at 500 V DC  
between input, output, power supply and  
grounding terminals mutually

Withstanding voltage: 2000 V AC for one minute  
between input, output, power supply and  
grounding terminals mutually

Operating temperature range: 0 to 50°C

Operating humidity range: 5 to 90% RH (no conden-  
sation)

Supply voltage range: 24 V DC  $\pm 10\%$   
100 to 130 V AC/DC ( $\pm 15\%$ )  
200-240 V AC ( $-15\%$ ,  $+10\%$ )

Effects of power line regulation: Up to  $\pm 0.1\%$  of span  
for the regulation within allowable range of  
each supply voltage range

Effects of ambient temperature variations: Up to  
 $\pm 0.2\%$  of span per 10°C

Power consumption:  
1.9 W at 24 V DC; 1.8 W at 110 V DC;  
3.9 VA at 100 V AC; 5.4 VA at 200 V AC

## ■ Mounting and Appearance

Material: Case body; ABS resin (black), UL94 V-0  
Socket; Modified polyphenylene oxide,  
including glass fiber (black), UL94 V-1

Mounting method: Wall or DIN rail mounting  
More than 5 mm interval is required for  
side-by-side close mounting.

Connection method: M3.5 screw terminals

External dimensions: 86.5 (H)  $\times$  51 (W)  $\times$  123 (D) mm  
(including a socket)

Weight: Approx. 200 g (main unit), approx. 60 g (socket)

## ■ Accessories

Spacer: One (used for DIN rail mounting)

Range labels: Two

## ■ Customized Signal Specifications

### Customized output

	Current Signal	Voltage Signal
Output range (DC)	0 to 20 mA	-10 to +10 V
Span (DC)	1 to 20 mA	10mV to 20 V
Zero elevation	0 to 150 %	-125 to +400 % *

\* -50 to +25% for the span of 20 mV DC or less.


### Customized segmental line linearization

Segmental points: 32 (Set I/O relation by percentage)

Settable range of segmental points: -6 to +106% for  
both of input and output


## ■ Front Panel

I/O adjustment and wiring resistance correction are  
available using selection switch and adjustment  
switch.

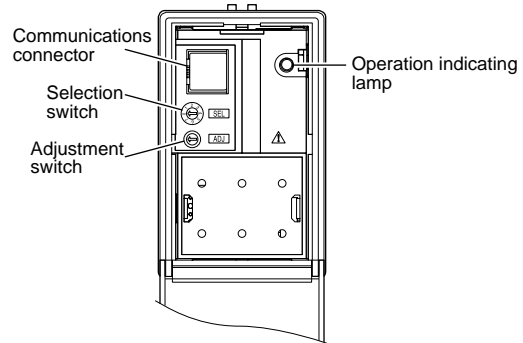


The position of a selection switch	Adjustment item
0	No function
1	Output zero adjustment
2	Output span adjustment
5	Wiring resistance correction

## ■ Terminal Assignments




1	OUTPUT	(+)
2	OUTPUT	(-)
3	INPUT	(+)
4	INPUT	(-)
5	N.C.	
6	GND	
7	SUPPLY	(L+)
8	SUPPLY	(N-)


## ■ Block Diagrams

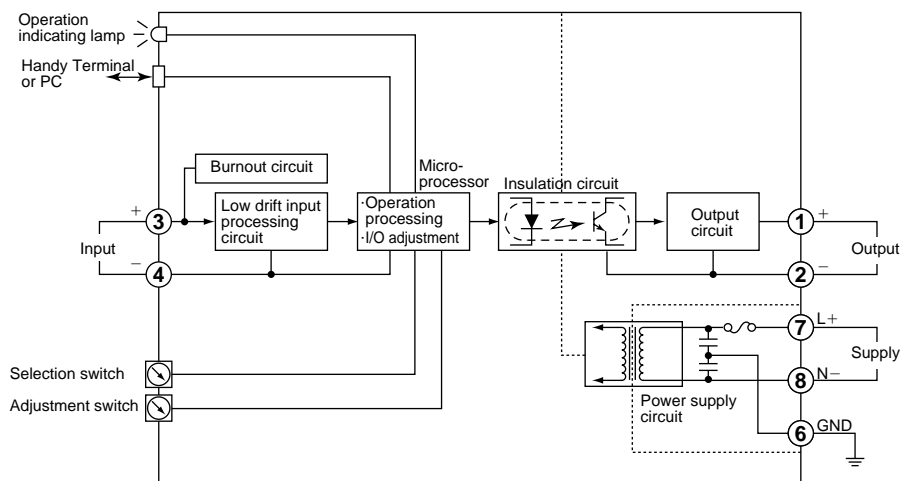

## ■ External Dimensions

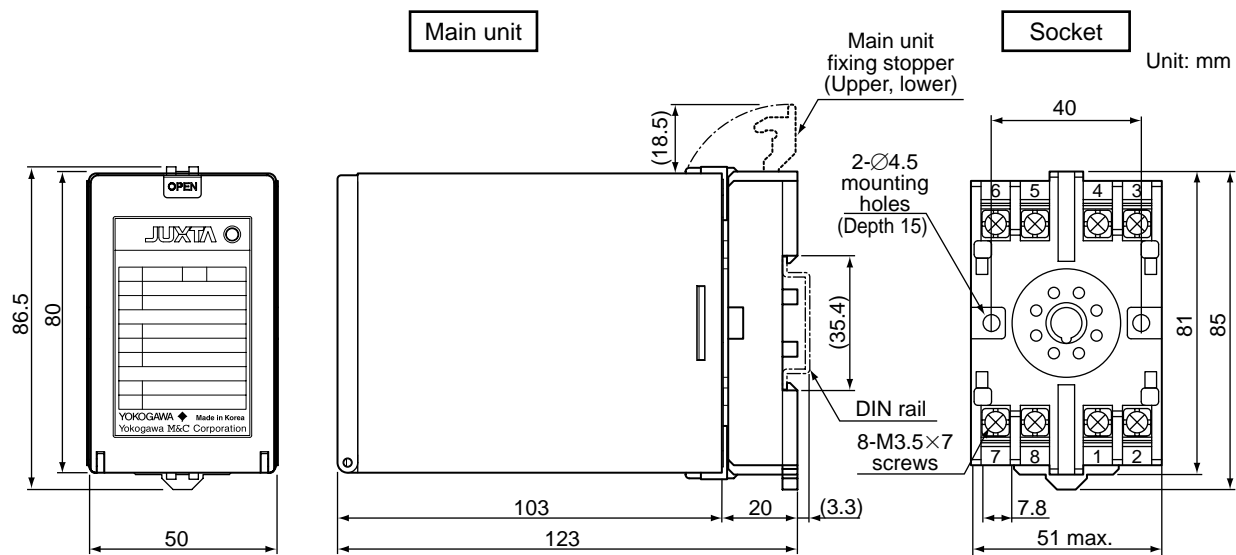

### <Mounting Dimensions>

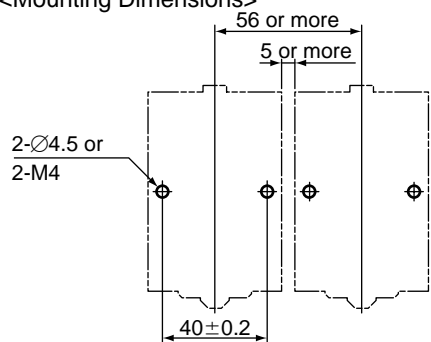

Unit: mm

- (1) More than 5 mm interval is required for side-by-side close mounting.
- (2) Use the supplied spacer for DIN rail mounting to keep 5 mm interval.

## ■ Work Sheet

Model and Suffix Codes

Write at least 2 points for input and output segmental points data.

Input (%)					Output (%)					Input (%)					Output (%)				
X0					Y0					X16					Y16				
X1					Y1					X17					Y17				
X2					Y2					X18					Y18				
X3					Y3					X19					Y19				
X4					Y4					X20					Y20				
X5					Y5					X21					Y21				
X6					Y6					X22					Y22				
X7					Y7					X23					Y23				
X8					Y8					X24					Y24				
X9					Y9					X25					Y25				
X10					Y10					X26					Y26				
X11					Y11					X27					Y27				
X12					Y12					X28					Y28				
X13					Y13					X29					Y29				
X14					Y14					X30					Y30				
X15					Y15					X31					Y31				
(Specification conditions) Input conditions: $-6.0\% \leq X0 < X1 < X2 < \dots < X_{n-1} < X_n \leq 106.0\%$ Output conditions: $-6.0\% \leq (Y0 \text{ to } Yn) \leq 106.0\%$																			

- The information covered in this document is subject to change without notice for reasons of improvements in quality and/or performance.