

General Specifications

Model JR11 RTD Converter (Free Range Type)

JUXTA

GS 77J03R01-01E

General

The JR11 is a plug-in type RTD converter that is connected to an IEC/JIS-standard resistance temperature detector (RTD) to convert temperature signals into isolated DC current or DC voltage signals.

- Selection of RTD type, input range setting, burnout setting, I/O adjustment, and I/O monitoring can be made through a PC (VJ77) or Handy Terminal (JHT200).
- The operation indicating lamp shows the operating status, abnormal setting and the like.
- Output adjustment and wiring resistance correction can be made using a switch on the front of the JR11 without a setting tool such as Handy Terminal.

Model and Suffix Codes

Model JR11-□□-□□□□

Usage _____
1: General use

Power supply _____
3: 24V DC $\pm 10\%$
4: 100-130 V AC/DC (Operating range: 85 to 150V AC/DC)
5: 200-240 V AC (Operating range: 170 to 264V AC)


Input signal _____
1: Pt100 (IPTS-68: JIS'89)
2: JPt100 (JIS'89)
3: Pt50 (JIS'81)
4: Pt100 (ITS-90: JIS'97)
0: Optional RTD

Output signal _____
A: 4 to 20mA DC 1: 0 to 10mV DC
B: 2 to 10mA DC 2: 0 to 100mV DC
C: 1 to 5mA DC 3: 0 to 1V DC
D: 0 to 20mA DC 4: 0 to 10V DC
E: 0 to 16mA DC 5: 0 to 5V DC
F: 0 to 10mA DC 6: 1 to 5V DC
G: 0 to 1mA DC 7: -10 to +10V DC
Z: Customized current signals* 0: Customized voltage signals*
* See Customized Signal Specifications

Burnout function _____
U: Up
D: Down
N: Off

Items to be Specified when Ordering

- Model and Suffix Codes: e.g. JR11-14-1AU
- Input range: e.g. 0 to 400 °C

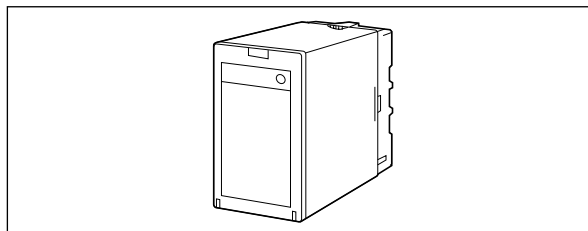

Input/Output Specifications

Input signal: A three-wire RTD, among the IEC/JIS-standard Pt100 (ITS-90: JIS'97), JPt100 (JIS'89), Pt50 (JIS'81) and Pt100 (IPTS-68: JIS'89) detectors

Range:

| Code | Input Type | Measuring Range | Measuring Span |
|------|-------------------------|-----------------|----------------|
| 1 | Pt100 (IPTS-68: JIS'89) | -200 to 660°C | 10°C minimum |
| 2 | JPt100 (JIS'89) | -200 to 510°C | |
| 3 | Pt50 (JIS'81) | -200 to 649°C | |
| 4 | Pt100 (ITS-90: JIS'97) | -200 to 850°C | |

Pt100 (IPTS-68) :R0 = 100 Ω , R100/R0 = 1.3850
JPt100 (JIS'89) :R0 = 100 Ω , R100/R0 = 1.3916
Pt100 (ITS-90) :R0 = 100 Ω , R100/R0 = 1.3851

Measuring current: Approx. 1 mA DC

Allowable leadwire resistance: [Input span (°C) \times 0.4 Ω] or 10 Ω per leadwire, equal or less than whichever is smaller; if the converter is combined with a BARD-700, this value is that of a resistance that can be attached externally, aside from the internal resistance of the BARD-700.

Output signal: DC voltage or DC current signal
Allowable load resistance:

| Output Range | Allowable Load Resistance | Output Range | Allowable Load Resistance |
|---------------|---------------------------|-----------------|---------------------------|
| 4 to 20 mA DC | 750 Ω maximum | 0 to 10 mV DC | 250 k Ω minimum |
| 2 to 10 mA DC | 1500 Ω maximum | 0 to 100 mV DC | 250 k Ω minimum |
| 1 to 5 mA DC | 3000 Ω maximum | 0 to 1 V DC | 2 k Ω minimum |
| 0 to 20 mA DC | 750 Ω maximum | 0 to 10 V DC | 10 k Ω minimum |
| 0 to 16 mA DC | 900 Ω maximum | 0 to 5 V DC | 2 k Ω minimum |
| 0 to 10 mA DC | 1500 Ω maximum | 1 to 5 V DC | 2 k Ω minimum |
| 0 to 1 mA DC | 15k Ω maximum | -10 to +10 V DC | 10 k Ω minimum |

Input adjustment: $\pm 1\%$ of span minimum (Zero/Span)

Output adjustment: $\pm 5\%$ of span minimum (Zero/Span)

Standard Performance

Accuracy rating: $\pm 0.1\%$ of span or 0.1°C , whichever is greater; for Pt50, $\pm 0.2\%$ of span or 0.2°C , whichever is greater; accuracy is not guaranteed for output levels less than 0.1mA for the output codes D, E, and F, and for output levels less than 0.0125mA for the output code G.

Response speed: 200 ms, 63% response (10 to 90%)

Burnout: Up, Down or Off; the maximum burnout time is specified as 60 seconds.

Insulation resistance: 100 M Ω minimum at 500 V DC
between input, output, power supply and
grounding terminals mutually

Withstanding voltage: 2000 V AC for one minute
between input, output, power supply and
grounding terminals mutually

Operating temperature range: 0 to 50°C

Operating humidity range: 5 to 90% RH (no conden-
sation)

Supply voltage range: 24 V DC \pm 10%
100 to 130 V AC/DC (\pm 15%)
200-240 V AC (-15%, +10%)

Effects of power line regulation: Up to \pm 0.1% of span
for the regulation within allowable range of
each supply voltage range

Effects of ambient temperature variations: Up to
 \pm 0.2% of span per 10°C

Effects of leadwire resistance variations: Up to
 \pm 0.1°C per 10 Ω /leadwire

Power consumption:
1.9 W at 24 V DC; 1.8 W at 110 V DC;
3.9 VA at 100 V AC; 5.4 VA at 200 V AC

■ Mounting and Appearance

Material: Case body; ABS resin (black), UL94 V-0
Socket; Modified polyphenylene oxide,
including glass fiber (black), UL94 V-1

Mounting method: Wall or DIN rail mounting
More than 5 mm interval is required for
side-by-side close mounting.

Connection method: M3.5 screw terminals

External dimensions: 86.5 (H) \times 51 (W) \times 123 (D) mm
(including a socket)

Weight: Approx. 200 g (main unit), approx. 60 g (socket)

■ Accessories

Spacer: One (used for DIN rail mounting)
Range labels: Two


■ Customized Signal Specifications

| | Current Signal | Voltage Signal |
|-------------------|----------------|------------------|
| Output range (DC) | 0 to 20 mA | -10 to +10 V |
| Span (DC) | 1 to 20 mA | 10mV to 20 V |
| Zero elevation | 0 to 150 % | -125 to +400 % * |

* -50 to +25% for the span of 20 mV DC or less.


■ Front Panel

Output adjustment and wiring resistance correction
are available using selection switch and adjustment
switch.

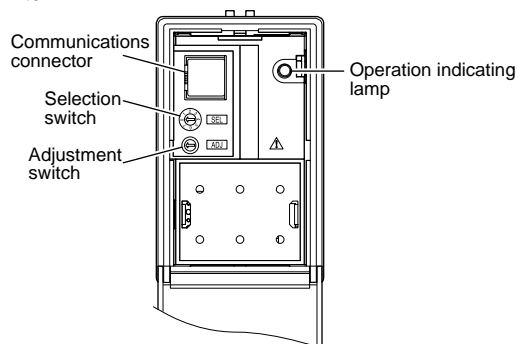


| The position of a selection switch | Adjustment item |
|---------------------------------------|------------------------------|
| 0 | No function |
| 1 | Output zero adjustment |
| 2 | Output span adjustment |
| 5 | Wiring resistance correction |

■ Terminal Assignments




| | | |
|---|--------|------|
| 1 | OUTPUT | (+) |
| 2 | OUTPUT | (-) |
| 3 | INPUT | (A) |
| 4 | INPUT | (B) |
| 5 | INPUT | (B) |
| 6 | GND | |
| 7 | SUPPLY | (L+) |
| 8 | SUPPLY | (N-) |


■ Block Diagrams

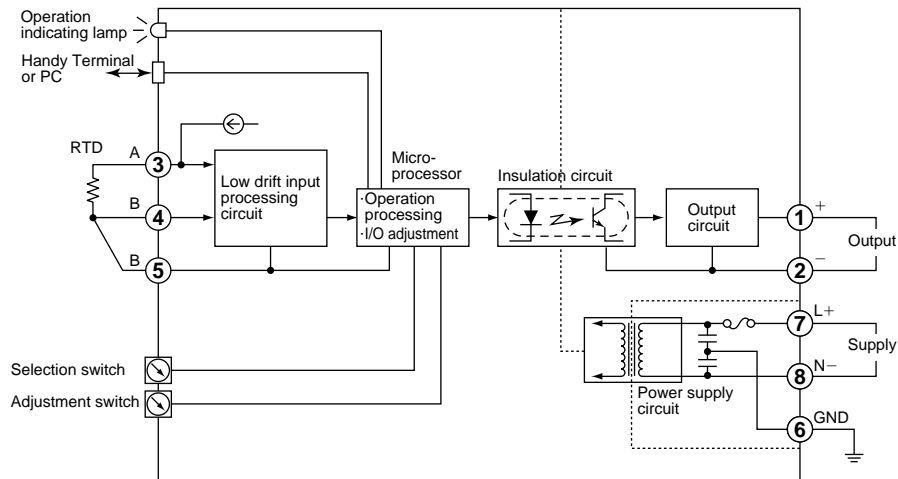

■ External Dimensions

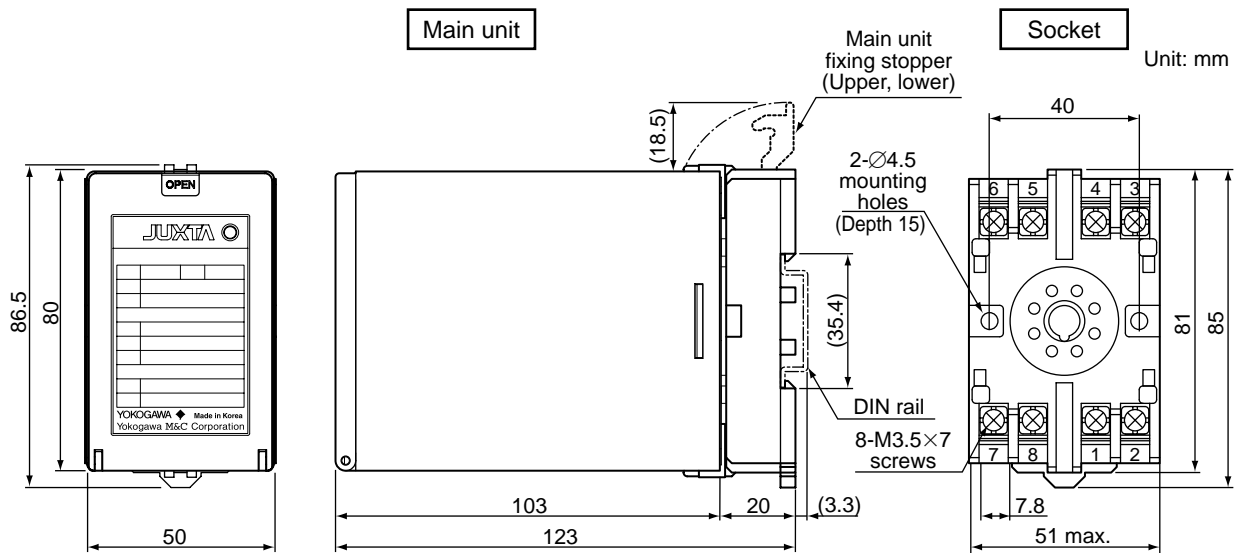

<Mounting Dimensions>

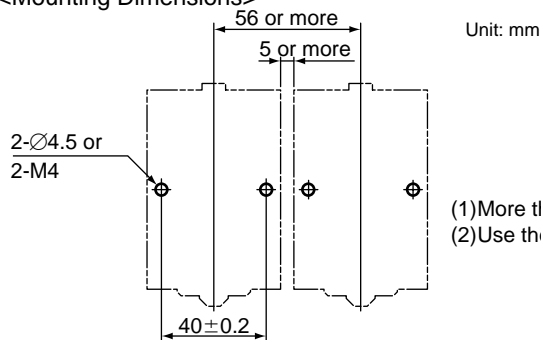

- (1) More than 5 mm interval is required for side-by-side close mounting.
- (2) Use the supplied spacer for DIN rail mounting to keep 5 mm interval.

• The information covered in this document is subject to change without notice for reasons of improvements in quality and/or performance.