



## ■ Safety and EMC Standards

CE:

EMC directive

EN 61326-1 Class A Table 2 <sup>\*1</sup> compliance

EN 61326-2-3 compliance

EN 61000-3-2 compliance

EN 61000-3-3 compliance

EN 55011 Class A Group 1 compliance

Low voltage directive:

EN 61010-1, EN 61010-2-030

Overvoltage category II <sup>\*2</sup>, Pollution degree 2 <sup>\*3</sup>,

Measurement category O (other)

CSA: CAN/CSA C22.2 No. 61010-1

CAN/CSA C22.2 No. 61010-2-030

Overvoltage category II <sup>\*2</sup>, Pollution degree 2 <sup>\*3</sup>,

Measurement category O (other)

UL: UL61010-1 (CSA NRTL/C)

UL 61010-2-030 (CSA NRTL/C)

Overvoltage category II <sup>\*2</sup>, Pollution degree 2 <sup>\*3</sup>,

Measurement category O (other)

RCM: EN 55011 Class A Group 1 compliance

KC: Electromagnetic wave interference prevention standard, electromagnetic wave protection standard compliance

- \*1 The instrument continues to operate at a measurement accuracy of within  $\pm 20\%$  of the range during testing.
- \*2 Overvoltage category II: Describes a number which defines a transient overvoltage condition. Implies the regulation for impulse withstand voltage. "II" applies to electrical equipment which is supplied from the fixed installation like a distribution board.
- \*3 Pollution degree 2: Describes the degree to which a solid, liquid, or gas which deteriorates dielectric strength or surface resistivity is adhering. "2" applies to normal indoor atmosphere. Normally, only non-conductive pollution occurs.

However, if optional code /C0 or /FB is specified, the conformity to the safety and EMC standards is excluded.

## ■ Environment Standard

EU RoHS directive: EN IEC 63000

(However, when option code /C0 or /FB is specified, CE marking is not applicable because the product does not comply with the Safety and EMC standards.)

## ■ Power Supply and Isolation

Power supply rated voltage:

100-240 V AC/DC  $\approx$  50/60 Hz or

15-30 V DC  $\approx$

Power supply input voltage:

100-240 V AC/DC  $\approx$  (-15, +10%) 50/60 Hz

or 15-30 V DC  $\approx$  ( $\pm 20\%$ )

Power consumption:

2.3 W at 24 V DC ; 2.2 W at 110 V DC;

4.6 VA at 100 V AC; 5.9 VA at 200 V AC

Insulation resistance: 100 M $\Omega$  minimum at 500 V DC between input, output-1, output-2, power supply and grounding terminals mutually

Withstanding voltage: 2000 V AC for one minute between input, (output-1 and output-2), power supply and grounding terminals mutually;

1000 V AC for one minute between

output-1 and output-2 terminals

## ■ Environmental Conditions

Temperature: -10 to 55°C (45°C or less for side-by-side close installation\*)

- \* If the previous model (style S3.xx earlier) is installed together, the ambient temperature is 0 to 40°C.

Humidity: 5 to 90% RH (no condensation)

Ambient Condition: Avoid installation in such environments as corrosive gas like sulfide hydrogen, dust, sea breeze and direct sunlight.

Magnetic field: 400 A/m or less.

Continuous vibration (at 5 to 9 Hz) Half amplitude of 3 mm or less (at 9 to 150 Hz) 4.9 m/s<sup>2</sup> or less, 1 oct/min for 90 minutes each in the 3-axis directions.

Impact: 98 m/s<sup>2</sup> or less, 11 msec, 3-axis 3 times each in 6 directions.

Altitude: 2000 m or less.

Installation location: Indoors

Warm-up time: At least 30 minutes after power on.

## ■ Transport and Storage Conditions

Ambient temperature: -25 to 70°C

Temperature change rate: 20°C per hour or less

Ambient humidity: 5 to 95%RH (no condensation)

## ■ Mounting and Appearance

Construction: Compact plug-in type

Material: Modified polyphenylene oxide (casing)

Mounting method: Wall, DIN rail or dedicated VJ mounting base (VJCE) mounting

Connection method: M3 screw terminals

External dimensions:

76 (H)  $\times$  29.5 (W)  $\times$  124.5 (D) mm

(including a socket)

Weight: Main unit: 100 g or less

Socket: 50 g or less

## ■ Accessories

Tag number label: 1 sheet

Socket (T9093FL): 1 piece (when /SN option is not specified.)

## ■ Customized Signal Specifications

### ● Output custom specification


Table 1 Manufacturable Ranges

	Current Signal	Voltage Signal
Output range (DC)	0 to 24 mA	-10 to +10 V
Span (DC)	1 to 24 mA	10 mV to 20 V
Zero elevation	0 to 200%	-100 to +200%

Note: Customized specifications for the output-1 signal within 0 to 20 mA DC or within -10 to +10 V DC comply with safety standards, EMC standards, and environmental standards.

- The above note is limited to the standard specification of output-2.
- Other customized specifications do not conform to these standards.


## Terminal Assignments

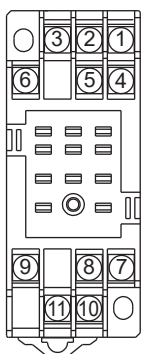


1	Input	(V)
2	Output-2	(+)
3	Input	(±)
4	Do not use	
5	Output-2	(-)
6	Do not use	
7	Output-1	(+)
8	GND	
9	Output-1	(-)
10	Supply	(L+)
11	Supply	(N-)

Do not use output-2 for the single-output type.

## Block Diagram

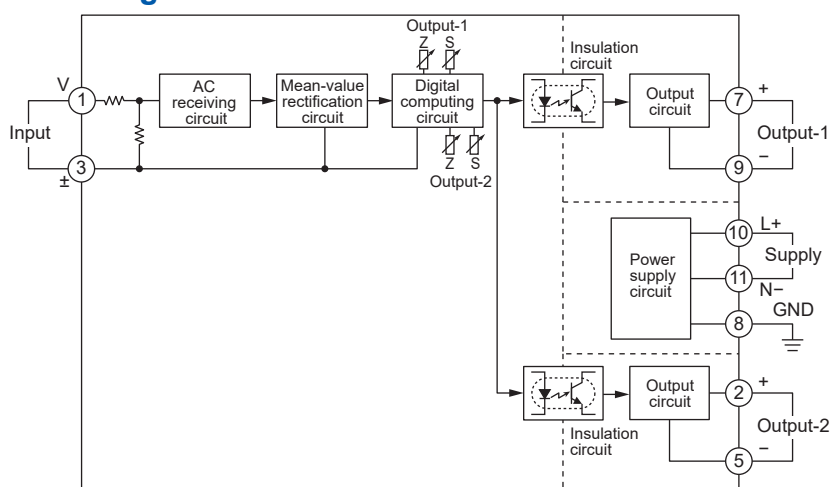

## External Dimensions

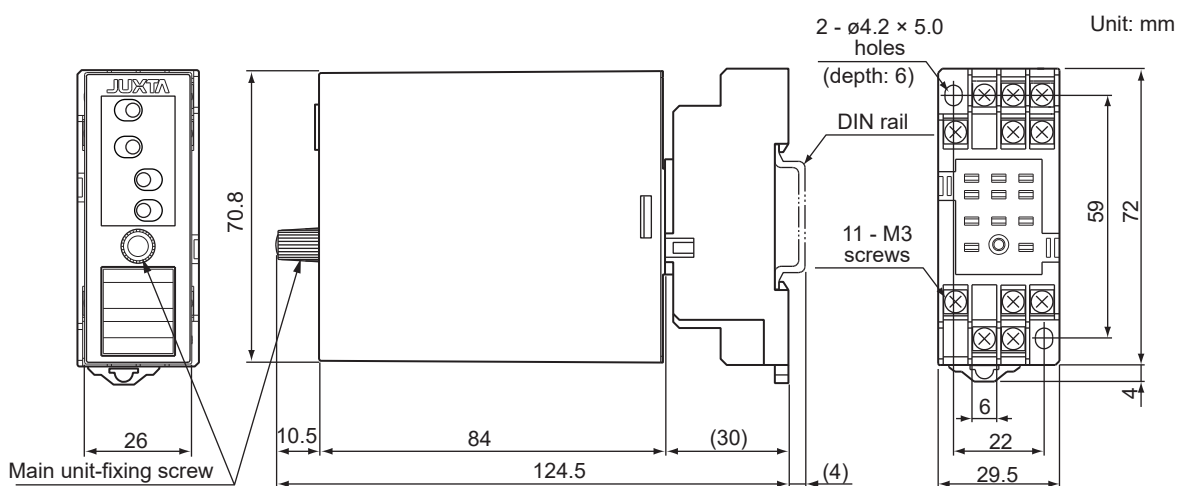

Normal Allowable Deviation =  $\pm$  (Value of JIS B 0401-2016 tolerance grade IT18) / 2