Drawings

C10FR
Flushing Connection Ring

DPharp EJX™
DPharp EJA™

SD 01C25W81-01EN

Unit: mm (approx. inch)

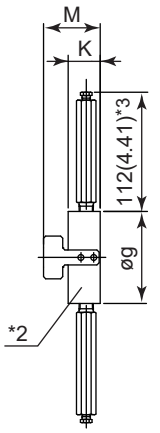

Straight type (raised face)
Reducer type (raised face)

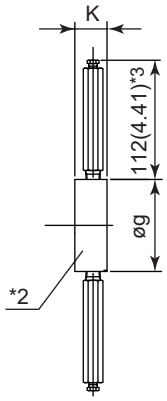

Straight type (ring type joint)

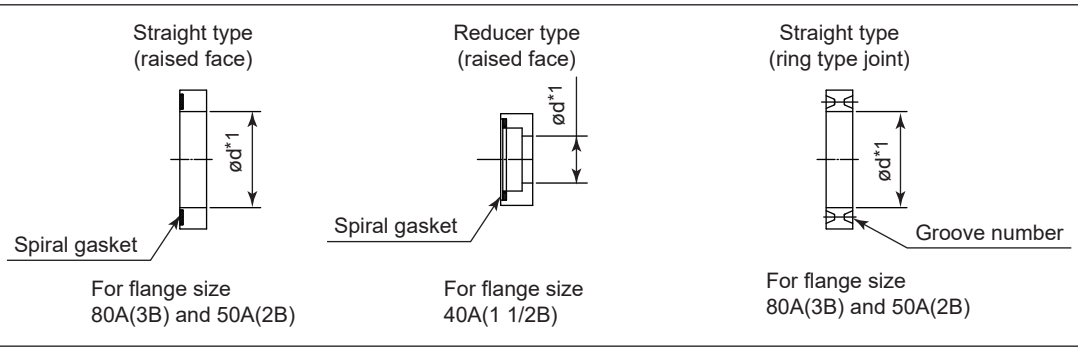

*1: Indicates inside diameter of gasket contact surface.
*2: Flushing connection ring.
*3: When option code K31 or K35 is selected, add 11 mm(0.43 inch).

Spiral gasket size

80A(3B)	ø100 × ø120 × t4.5 (ø3.94 × ø4.72 × t0.18)
50A(2B)	ø70 × ø90 × t4.5 (ø2.75 × ø3.54 × t0.18)
40A(1 1/2B)	ø60 × ø75 × t4.5 (ø2.36 × ø2.95 × t0.18)

Code			Size				Groove number
Sealing face	Process Connection size	Flange pressure rating	øg	ød	K	M	
F	3	—	130(5.12)	90(3.54)	27(1.06)	47(1.85)	—
	2	—	100(3.94)	61(2.40)	27(1.06)	47(1.85)	—
	8	—	86(3.39)	44(1.73)	30(1.18)	53(2.09)	—
J	3	2,4	147(5.79)	90(3.54)	40(1.57)	—	R31
		5	156(6.14)	90(3.54)	40(1.57)	—	R31
		6	169(6.65)	90(3.54)	40(1.57)	—	R35
	2	2,4	110(4.33)	61(2.40)	40(1.57)	—	R23
		5,6	125(4.92)	61(2.40)	40(1.57)	—	R24

All Rights Reserved. Copyright © 2016, Yokogawa Electric Corporation.
Subject to change without notice. Printed in Japan.

SD 01C25W81-01EN
1st Edition: May 20, 2016
4th Edition: Nov. 30, 2021