

# Drawings


## OpreX™ Pressure Transmitter EJX S Series Position Adjustable Bracket (Bracket code: P)

SD 01C33B10-01EN

Unit: mm (approx. inch)

### • Vertical Impulse Piping Type


- Process connector upside (The drawing below is for Installation code 2, 6.)

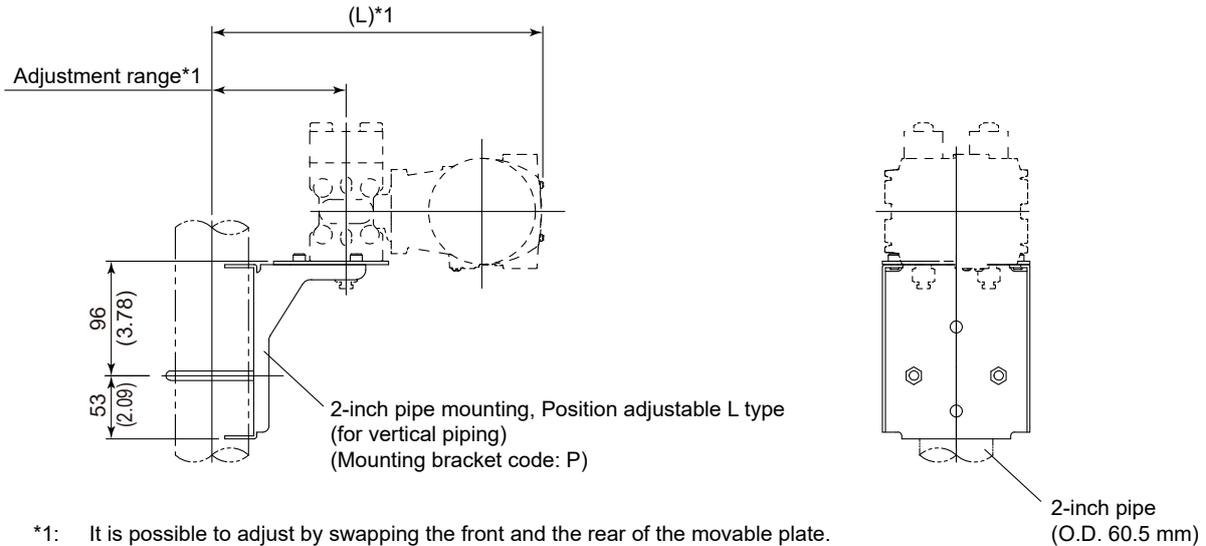

Model	MS code						L	Adjustment range
	Capsule range	Wetted Parts Material	Installation	Housing	Mounting Bracket	Orifice for low flow measurement		
EJX110S	M, H, V	S, L, F, G, J, K	2, 6	1	P	N	237 to 294 (9.33 to 11.57)	75 to 132 (2.95 to 5.20)
	F, J, K, P, Q	S, F, G					252 to 309 (9.92 to 12.17)	
	L, M, H, V	H, M, T, A, D, B, W					237 to 294 (9.33 to 11.57)	
	E	-					252 to 309 (9.92 to 12.17)	
	1, 2, 3, 5, 6	-					237 to 294 (9.33 to 11.57)	
	M, H	S, F					252 to 309 (9.92 to 12.17)	
EJX310S	-	-						
EJX430S	H, A, B	S, L, F, G, J, K				N	237 to 294 (9.33 to 11.57)	
	H, A, B	H, M, T, A, D, B, W					252 to 309 (9.92 to 12.17)	
	C, D	-					237 to 294 (9.33 to 11.57)	

Unit: mm (approx. inch)

- Process connector downside (The drawing below is for Installation code 3, 7.)

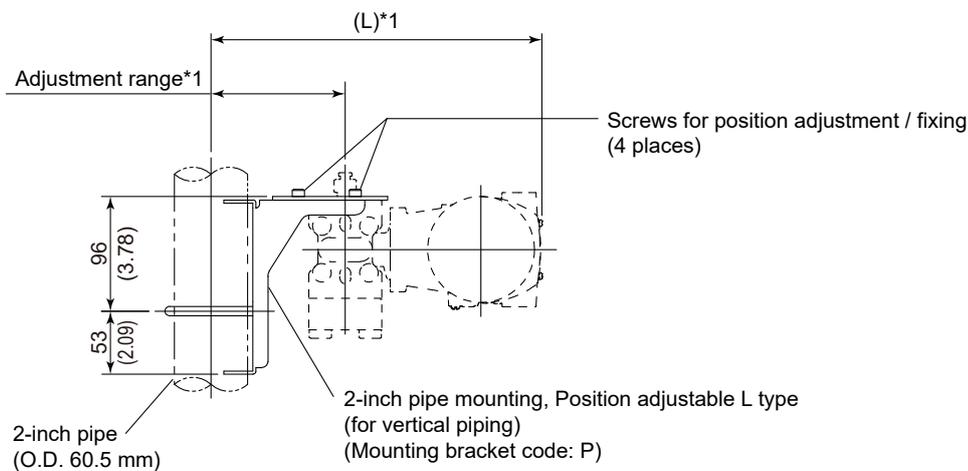

- \*1: It is possible to adjust by swapping the front and the rear of the movable plate.

Model	MS code						L	Adjustment range
	Capsule range	Wetted Parts Material	Installation	Housing	Mounting Bracket	Orifice for low flow measurement		
EJX110S	M, H, V	S, L, F, G, J, K	3, 7	1	P	N	250 to 294 (9.84 to 11.57)	88 to 132 (3.46 to 5.20)
	F, J, K, P, Q	S, F, G					265 to 309 (10.43 to 12.17)	
	L, M, H, V	H, M, T, A, D, B, W					289 to 309 (11.38 to 12.17)	
	E	-					250 to 294 (9.84 to 11.57)	
	1, 2, 3, 5, 6	-					265 to 309 (10.43 to 12.17)	112 to 132 (4.41 to 5.20)
	M, H	S, F					1, 2, 3, 4, 5, 6	250 to 294 (9.84 to 11.57)
	F	S, F				265 to 309 (10.43 to 12.17)		
EJX310S	-	-					250 to 294 (9.84 to 11.57)	88 to 132 (3.46 to 5.20)
EJX430S	H, A, B	S, L, F, G, J, K				N	265 to 309 (10.43 to 12.17)	
	H, A, B	H, M, T, A, D, B, W					250 to 294 (9.84 to 11.57)	
	C, D	-						