


# Drawings

## OpreX™ Pressure Transmitter EJX530S Gauge Pressure Transmitter For Hygienic Wetted Parts Material Code: 1, 2


SD 01C33F10-01EN

Unit: mm (approx. inch)


- ISO51 W-Clamp connection type (Wetted Parts Material Code: 1 and Process connections code: E )

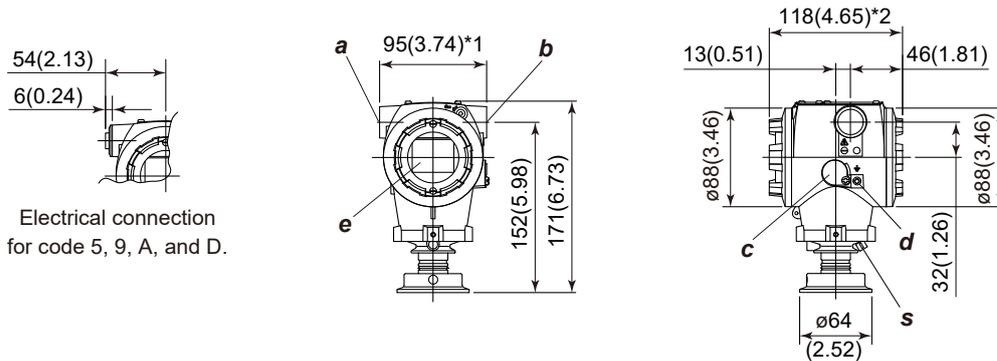

- ISO38 W-Clamp connection type (Wetted Parts Material Code: 1 and Process connections code: C)

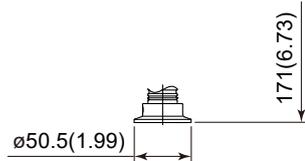

- ISO51 Union connection type (Wetted Parts Material Code: 2 and Process connections code: E)

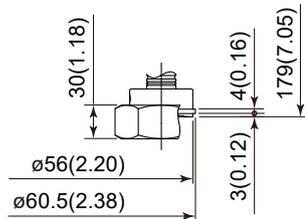


<b>a</b>	External indicator Conduit connection (optional)	<b>c</b>	Zero adjustment	<b>e</b>	Display (optional)
<b>b</b>	Conduit connection	<b>d</b>	Ground terminal	<b>s</b>	Open to atmosphere

\*1: In case of electrical connection code 7 or C is specified, a blind plug is protruded by up to 8 mm (0.31 inch) from conduit connection.

\*2: In case of Display and interface code N specified, it is 113 mm (4.45 inch).

### • Terminal Configuration

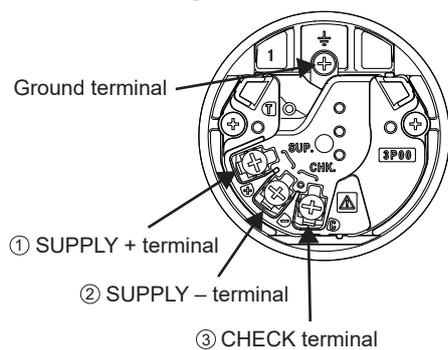

### • Terminal Wiring

SUPPLY +	①	] Power supply and output terminals
—	②	
CHECK +	③	] External indicator (ammeter) terminals *1
—	②	
		⏏ Ground terminal

\*1: When using an external indicator or check meter, the internal resistance must be  $10\Omega$  or less. Not available for PROFINET communication type.