



SD 04L21B01-01EN

External Dimensions

Unit: mm
(approx. inch)


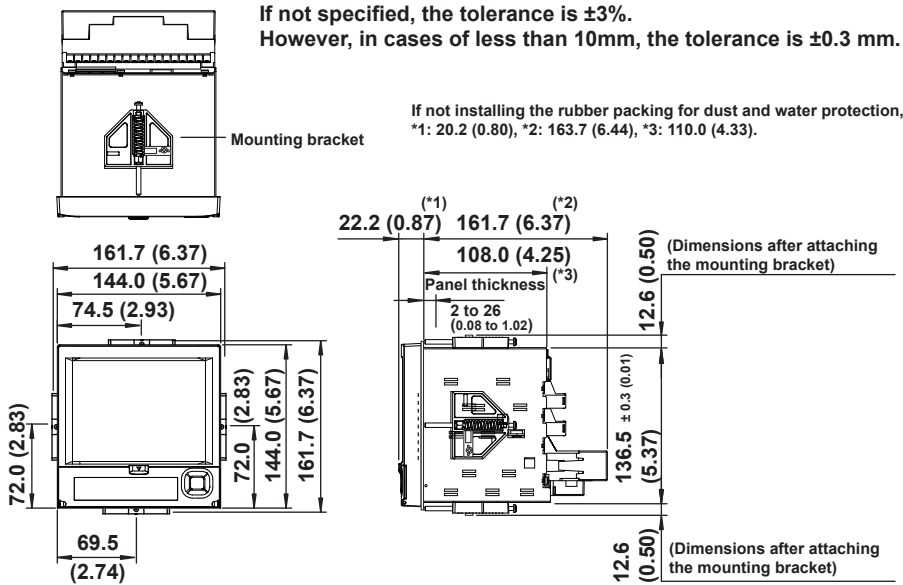


Panel Cutout Dimensions

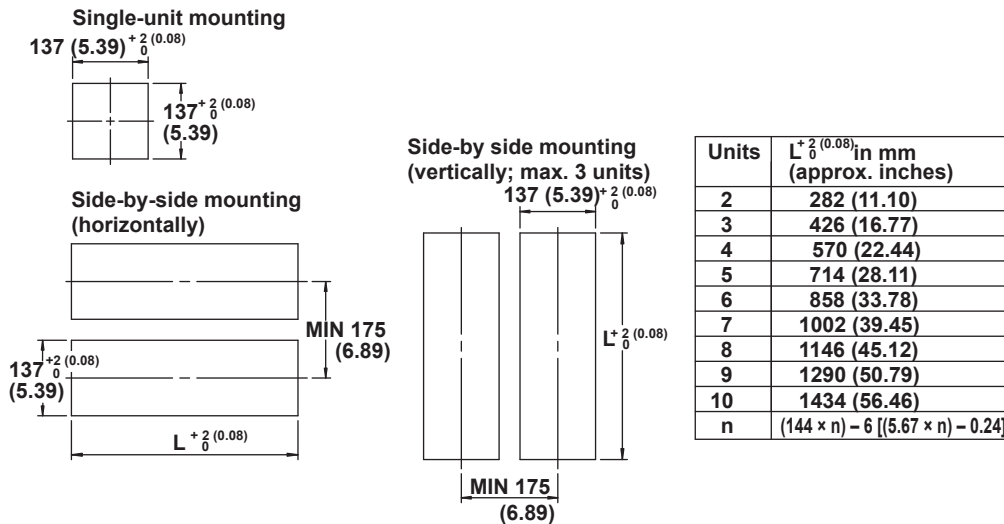

Arrangement of the Terminals

Input Terminals

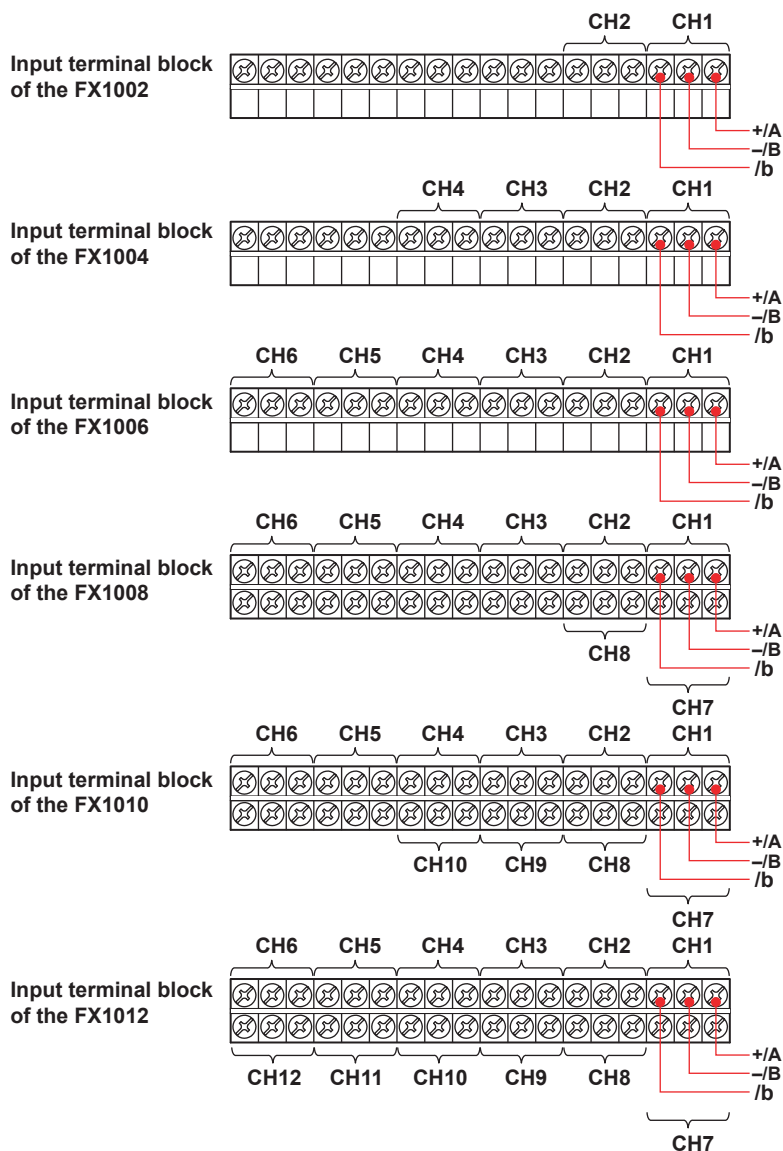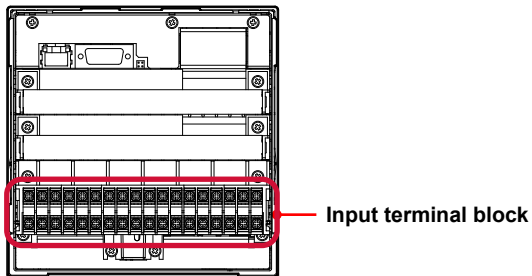

For TC input, use shielded compensating lead wires for wiring.

For RTD input, lead wire resistance per wire of 10 Ω or less. Make the resistances of the three wires equal.

For DCA input, example: for 4 to 20 mA input, use a shunt resistor of 250 $\Omega \pm 0.1\%$.

Optional Terminals

