

Drawings


Model UT32A
Digital Indicating Controller



SD 05P01D31-01EN


External Dimensions

Unit: mm
(approx. inch)

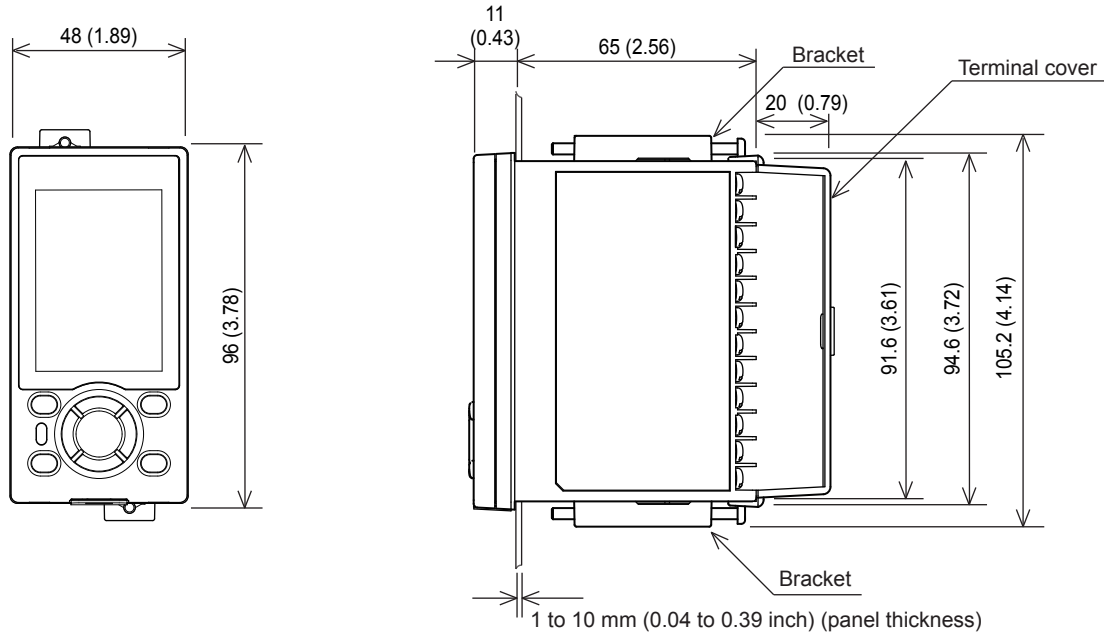


Panel Cutout Dimensions

General mounting

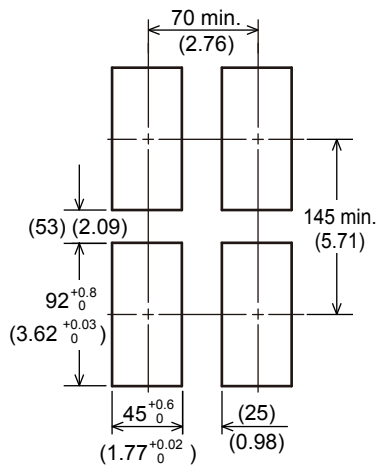


Side-by-side close mounting

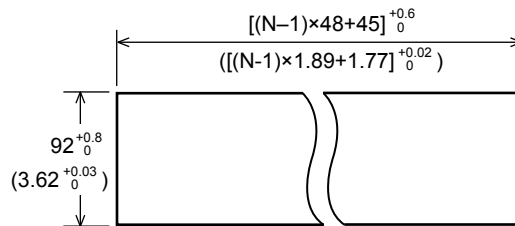

"N" stands for the number of controllers to be installed.
However, the measured value applies if $N \geq 5$.

Normal tolerance: \pm (value of JIS B 0401-1998 tolerance grade IT18) / 2

Terminal Wiring Diagrams

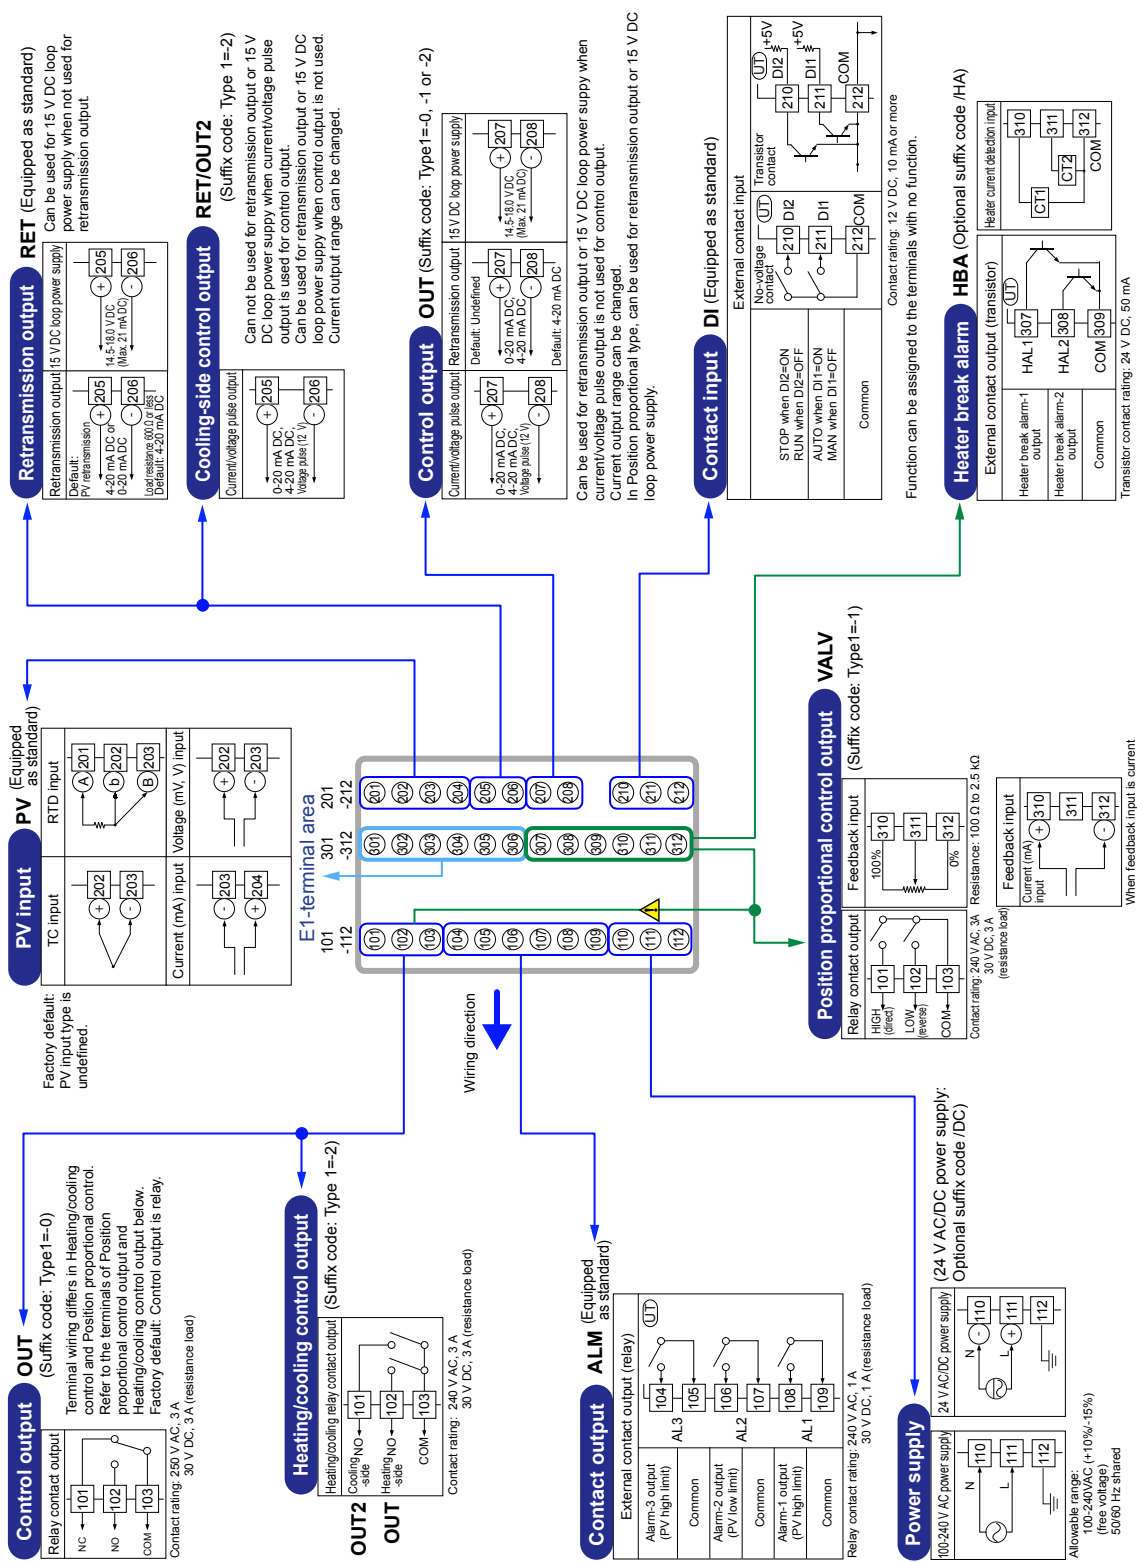


Terminal Wiring Diagrams (E1-Terminal Area)

301-306

E1-Terminal Area


RS-485 communication RS485

(Suffix code: Type 2=1)




24 V DC loop power supply LPS24

(Suffix code: Type 2=0 and optional suffix code /LP)



CC-Link communication (with Modbus master) CC-L

(Suffix code: Type 3=3)

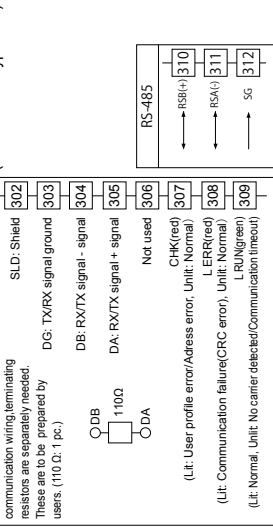

Contact input / Contact output DI/DO (Suffix code: Type 2=2)

