

Drawings

Model UT32A/MDL Controller (Mount on DIN Rail)


UTAdvanced®

Functional
Enhancement

SD 05P01D31-06EN


External Dimensions

Unit: mm
(approx. inch)

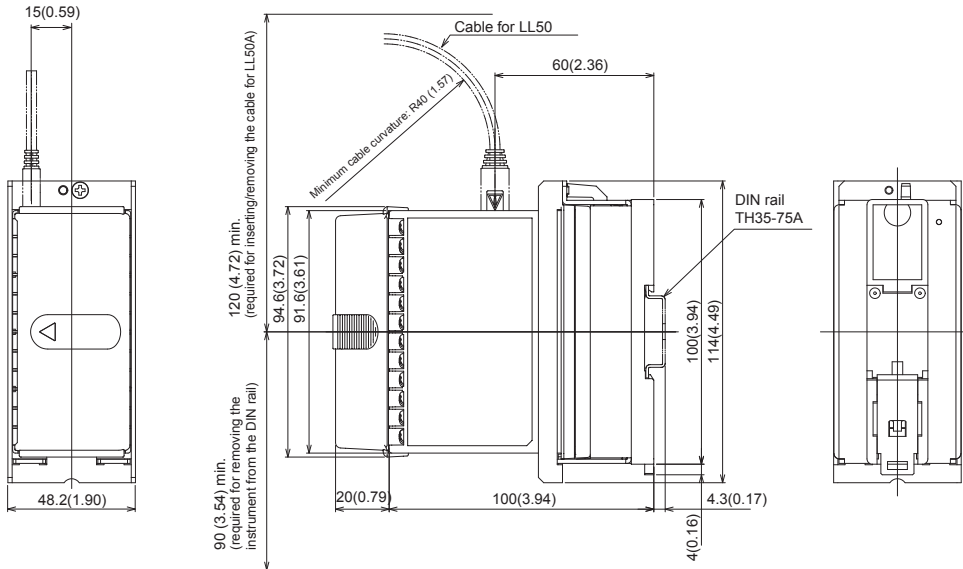

Note:
Trigonometry
General tolerance = \pm (JIS B 0401-1998 tolerance class IT18)/2

Terminal Wiring Diagrams

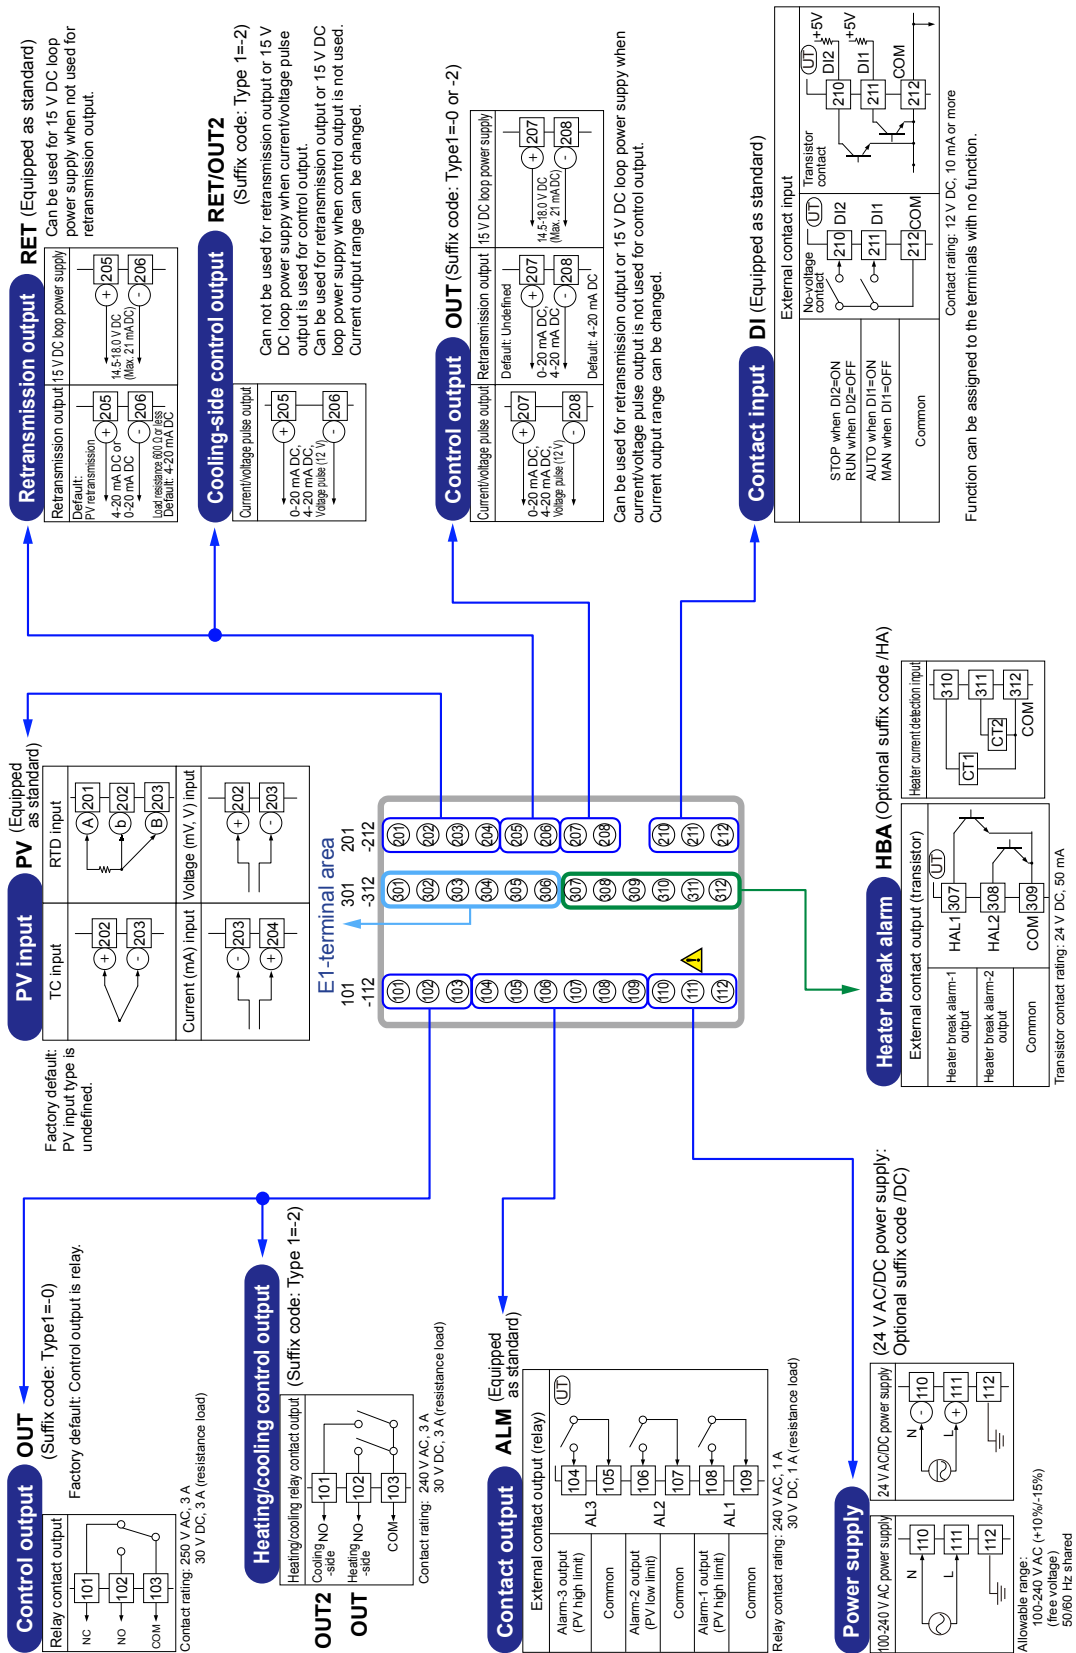


Terminal Wiring Diagrams (E1-Terminal Area)

301-306

E1-Terminal Area


RS-485 communication RS485

(Suffix code: Type 2=1)




24 V DC loop power supply LPS24

(Suffix code: Type 2=0 and optional suffix code /LP)



RS-485 communication/24 V DC loop power supply RS485/LPS24

(Suffix code: Type 2=1 and optional suffix code /LP)



CC-Link communication (with Modbus master) CC-L

(Suffix code: Type 3=3)

